


FLORA TUNABLE

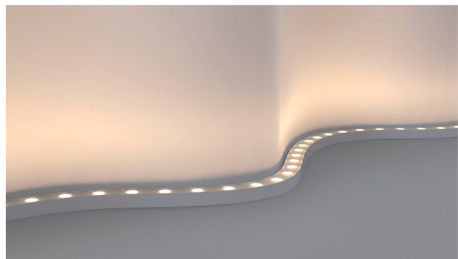

DESCRIPTION:


FLORA TUNABLE Flexible Wall Washer series constructed using Silicon extrusion process. Uniform, dot free light emission, good appearance consistency. Anti-yellowing, high temperature and corrosion resistance, weak acid and alkali resistance UV proof for true outdoor applications. Easy installation with clips and bendable track. Cutable for Flexible application. Control mode : DALI DT8, DMX.

TECHNICAL DETAILS:

Power : 16W/M
Voltage : DC24V
CRI >90
Length/Reel : 5M
Cutting length: 250mm
Led Qty : 24 LEDs/M
Working Temperature : -25~55°C
Storage Temperature : -30~80°C
Voltage Range : 23 ~25V dc
Reverse Voltage : 25V dc
Warranty : 5 years

LUMENS PER METER:

OPTICS : 15°/30°/60°/30x45°/25x20°
CCT : 2700K-6500K
16W : 90-100lm/W

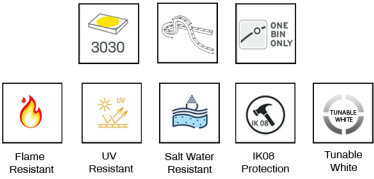


INSTALLATION :


Horizontal and Vertical Bend

Product Code : 7032721


DIMENSION:

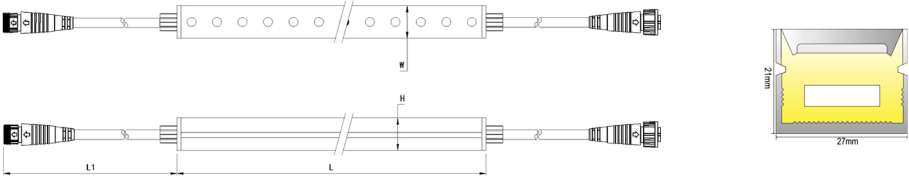


LIGHT DISTRIBUTION:



BENDING:

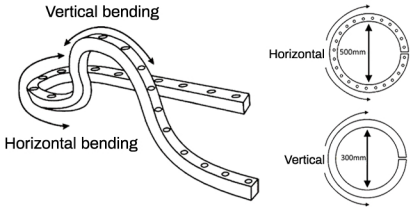

End cap

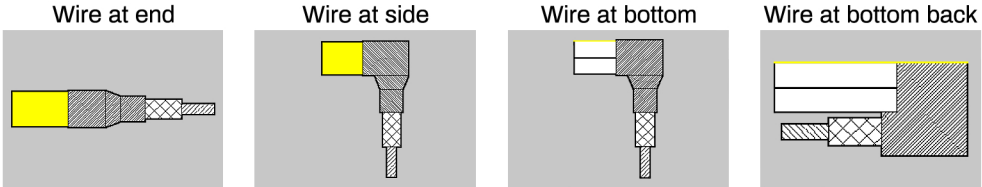

Standards


EN 60598-1
EN 60598-2-2
EN 60598-3-2

Order Code Ex : 7032721	16	27-65	15
Product Code	Power	CCT	Beam Angle
7032721	16-16W	27-65 : 27K-65K	15-15°
			30-30°
			60-60°
			30x45°
			25x20°

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C


Accessories installation diagram

Install buckle : 7032721-01

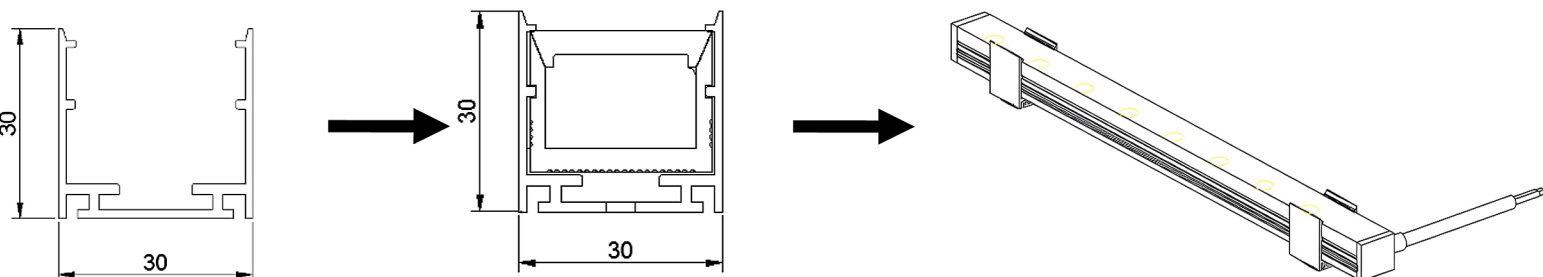


Rotating bracket : 7032721-02

with Aluminum profile

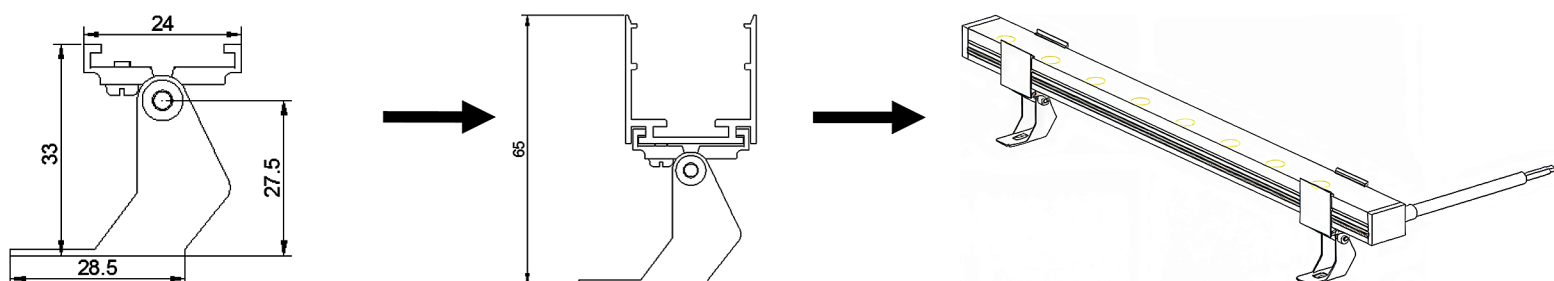


Aluminum profile : 7032721-03

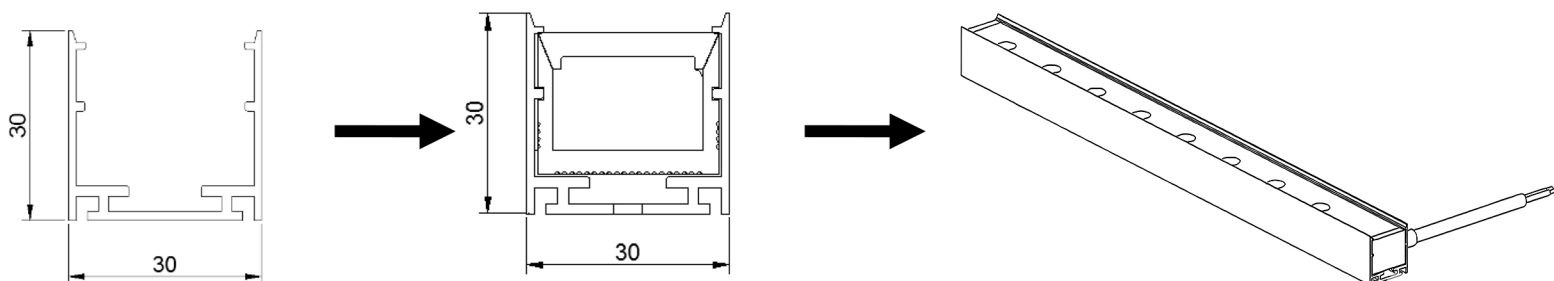


Rotating bracket : 7032721-04

with Aluminum profile

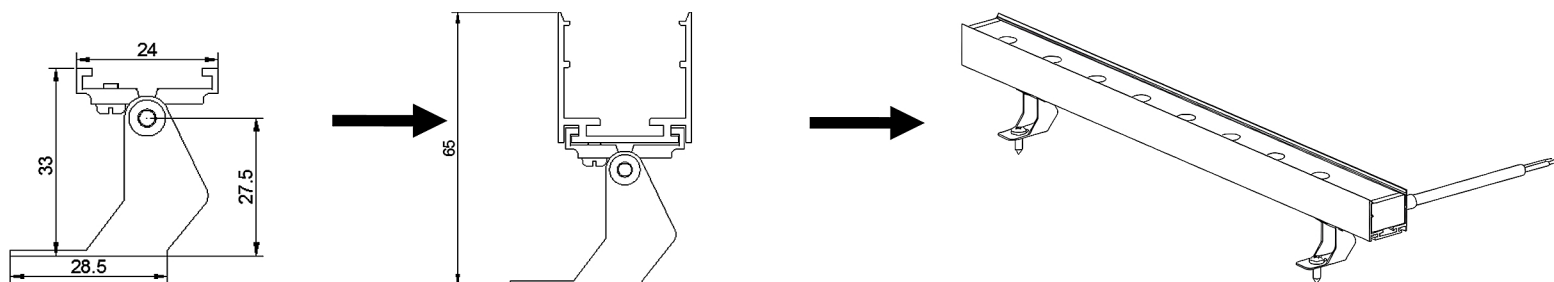


Shading plate : 7032721-05

with Aluminum profile

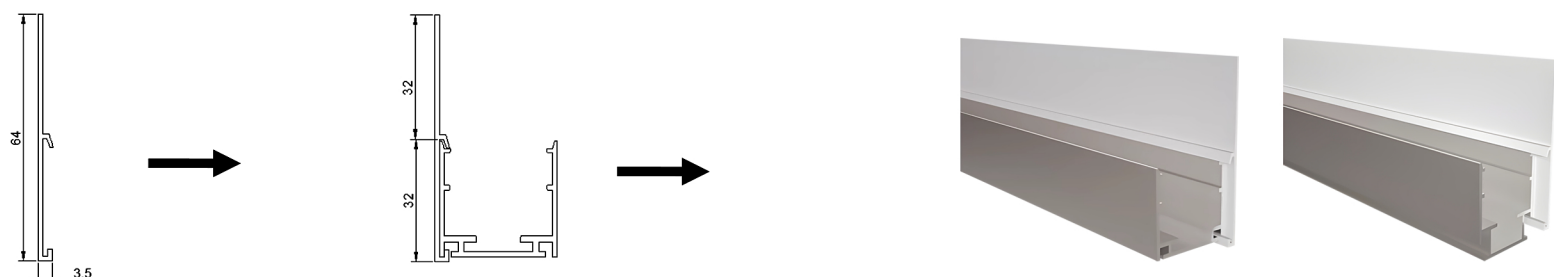


Accessories Installation Diagram

Free-bending Aluminum profile : 7032721-06

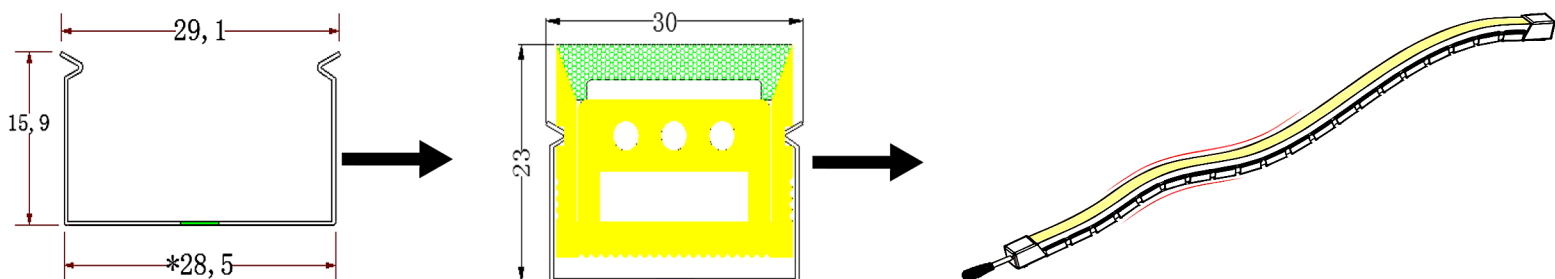

Bottom return line : 7032721-07

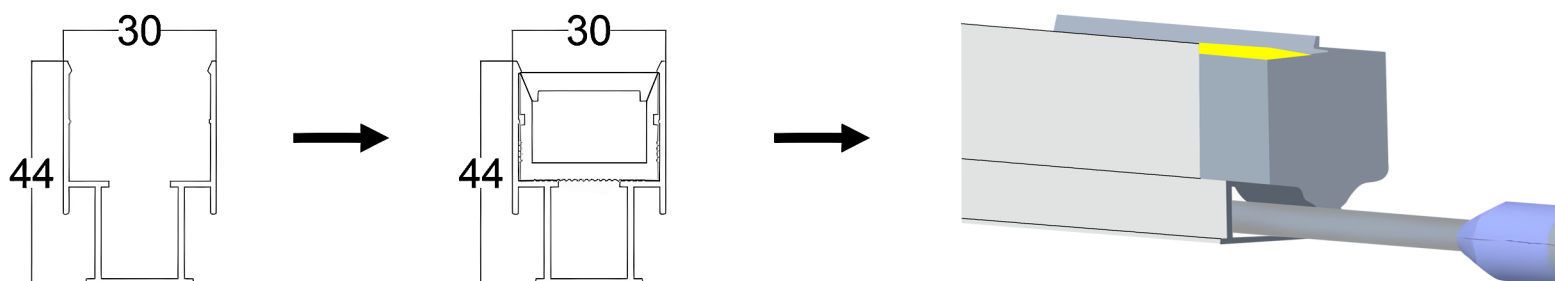

End Cap : 7032721-08



Closed End Cap
Material: silicone
Color: white

Connector : 7032721-09



IP67 Connector 3PIN
Wire gauge: 0.326mm²/22AWG
Protection: IP67 (Mated)
Connector type : Male

Connector : 7032721-10



IP67 Connector 3PIN
Wire gauge: 0.326mm²/22AWG
Protection: IP67 (Mated)
Connector type : Female

Accessories Installation Diagram

T Type Connector : 7032721-11








IP67 T Type Connector


Wire Gauge: 0.326mm²/22AWG

Protection: IP67 (Mated)


Beam Angle

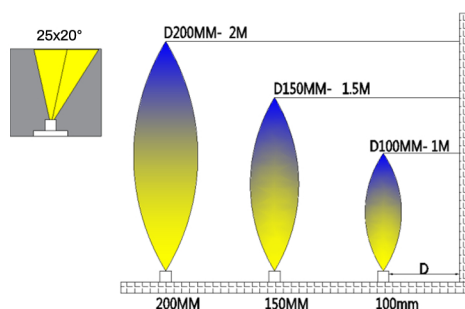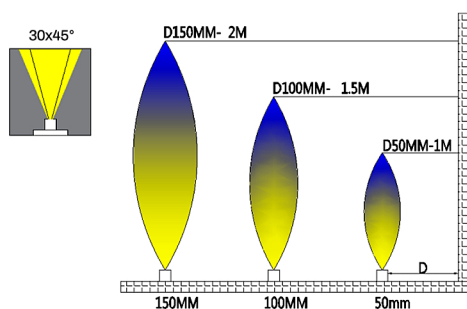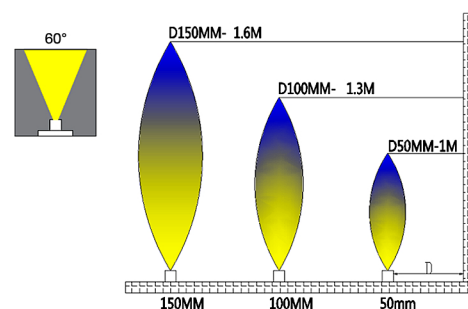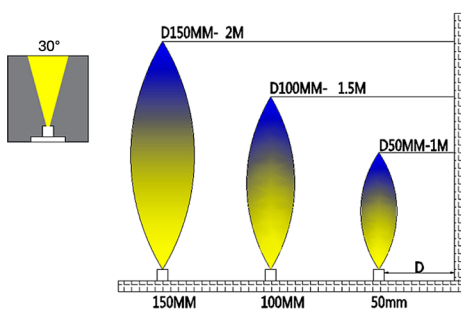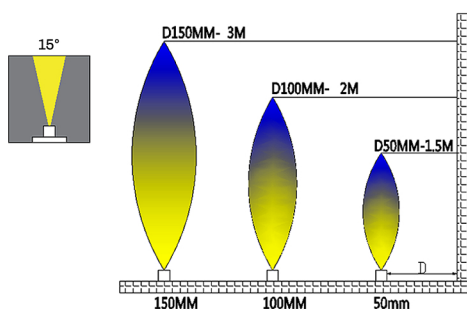

ADDITIONAL INFO.

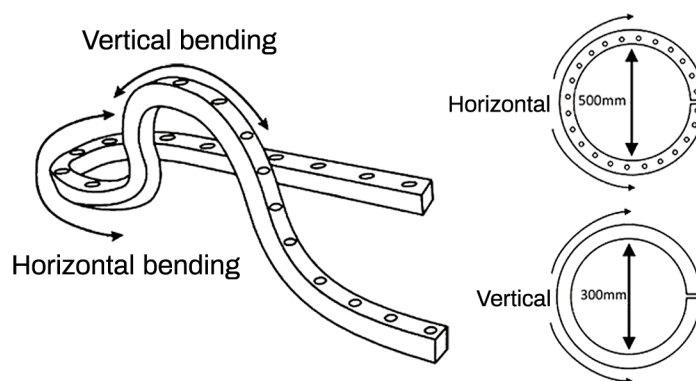

- ▶ Please light it up for a quick check before installation.
- ▶ Bending diameter of FLORA TUNABLE 2721 is 500mm for Horizontal and 300mm for Vertical. Do not bend too sharp or twist. If bend it wrongly, PCB inside will be damaged and the lighting fixture will not turn on.
- ▶ During installation, please make sure there are at least two workers to cooperate together and strictly follow the instruction manuals.
- ▶ Warranty: All LED light are warranted to be free from defects in product itself for 5 years from the date of purchase. This warranty does not cover failures due to abuse, misuse, improper handling, act of nature, negligence, normal wear, accidental damage, repairs made by the purchaser or incorrect voltage conditions.

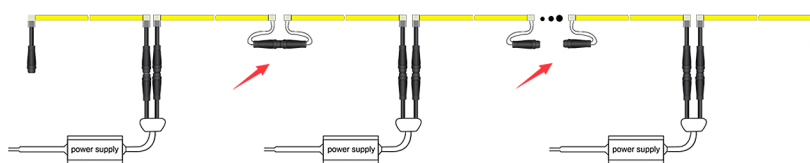


Note:

-16W/M Max. 7mtr run length to double side feed.


-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 5%.

WIRING DIAGRAM

DMX

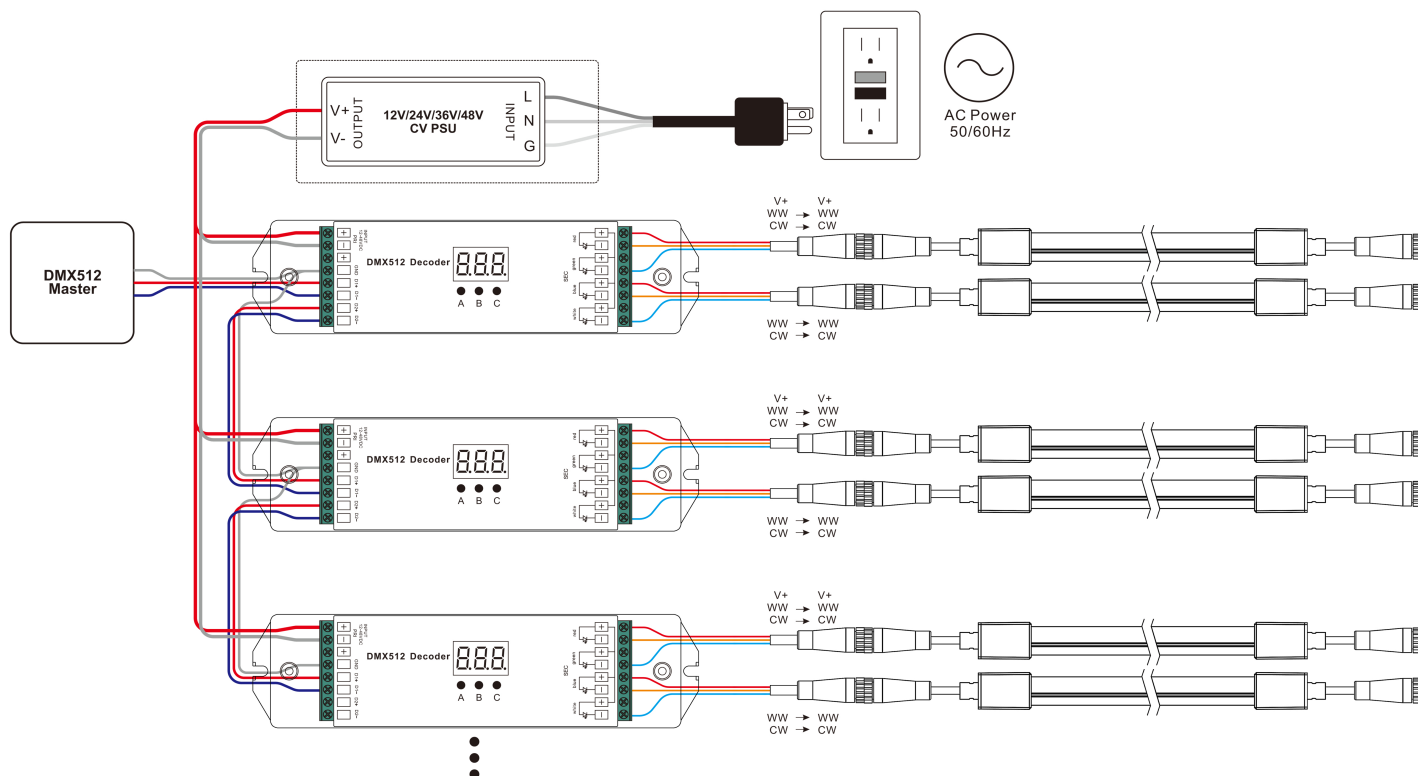

1 DALI


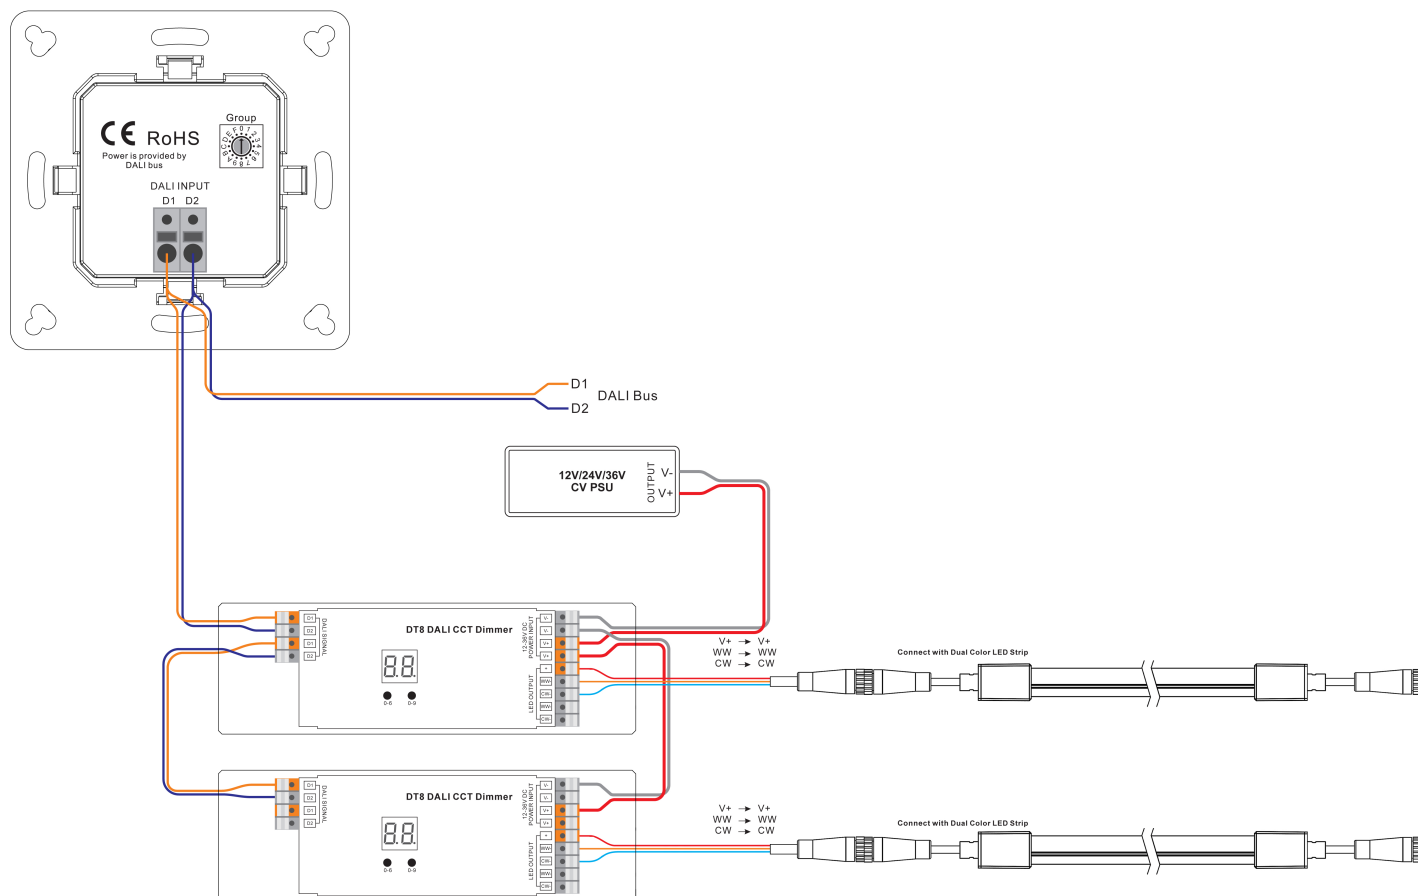


GENERAL MOUNTING


LED neon flex can be fastened to surfaces using appropriate accessories available from distributor. Please refer to data sheets or contact technical support for a copy. The use of glues and resins as fixing agents should be avoided. Use of glues and resins may invalidate the warranty of the product unless its use is agreed in writing by distributor as part of a detailed project specification.

The images indicate one type of fixing available in the accessories range. The different fixings serve obvious purposes, however when in doubt technical support should be contacted.



Quantities of accessories and fixings are dependent on the type and its effect on the variant it's being used with. Care should be taken to ensure drooping is avoided, and to ensure that is fastened adequately to avoid stresses on itself.

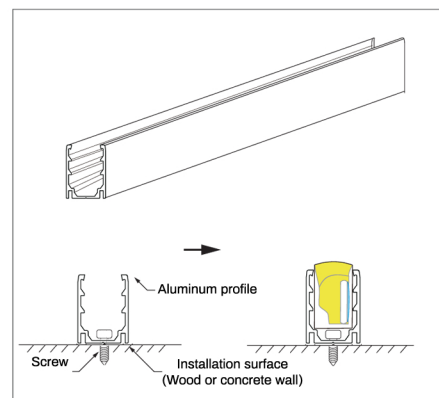


Press the flex light into mounted aluminum channel in one direction.

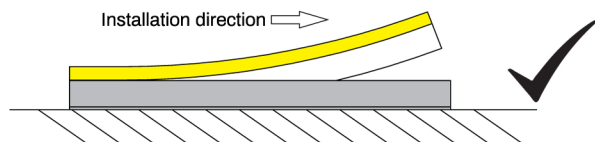



Incorrect installation like below picture could lead to light failure.

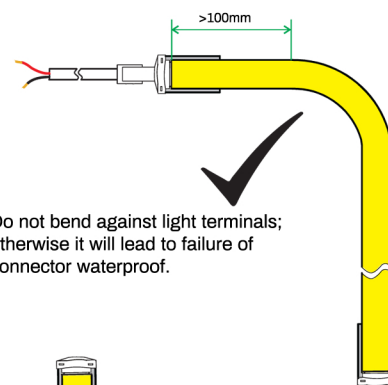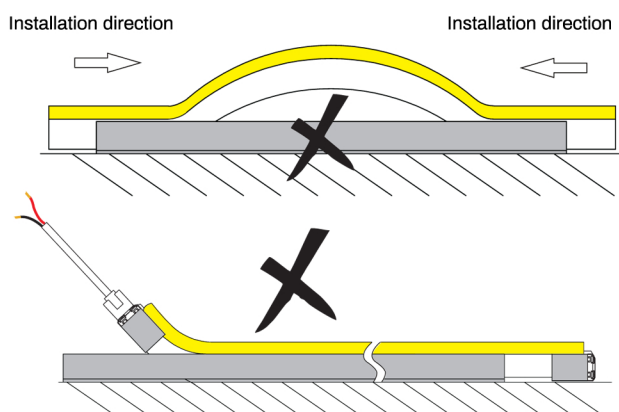


Do not bend against light terminals; otherwise it will lead to failure of connector waterproof.

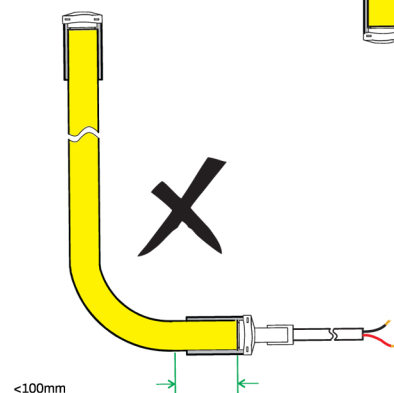

Ensure the feeding cable not bear force, keep the head 10mm in natural loose.

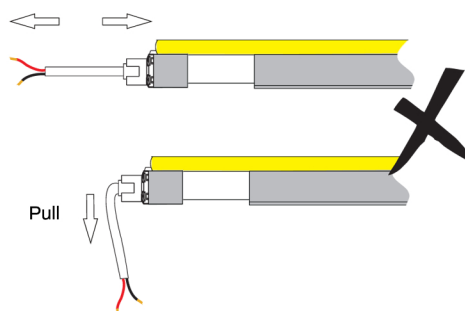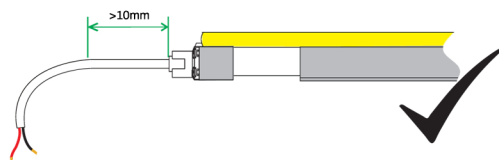


Mount the cable junction in hermetic enclosure like waterproof junction box in outdoor application.




INSTALL

Attention



1. Correct bending way


Intallation



1. Installation of clip


Fix the clips and aluminum profile via the screws

⚠ Suggestion: 2pcs clips per meter.



2. Installation of Neon


Simultaneously install the neon from both ends



3. Installation of Neon


Should use tools to assist when remove the neon

Cutting/Soldering/Intall end cap




1. Cut the neon to be required length


⚠ The minimum cutting unit is based on the cutting mark.



2. Cut the side of neon, expose the soldering pad




3. Solder the cable onto the PCB




4. Put the wire into and inject glue into the end cap

⚠ The amount of glue is about 1/3-1/2 of end cap



5. Push the end cap to wrap end of neon

⚠ After the glue is injected, the neon needs to be laid flat for 2 hours to before other process.



6. Apply gel around the tail of neon and install the end cap

⚠ After the glue is injected, the neon needs to be laid flat for 2 hours to before project process. Glue will complete dry after 24 hours.

