

## FILLET WHITE



### FEATURES:

Illuminate your space with our versatile IP65 COB strip lights, perfect for both indoor and outdoor applications. With their superior waterproof design (IP65 rating), these strip lights are resistant to dust, solid objects, and water, making them ideal for areas where exposure to moisture or humidity is a concern. Utilizing (COB) LED technology, these lights deliver powerful illumination with enhanced energy efficiency, offering savings on your energy bills without compromising brightness. Suitable for various indoor and outdoor uses including accent lighting, task lighting, ambient lighting, and architectural enhancements 100,000 Switching cycles. Control mode : ON/OFF, DALI, Phase Cut, 0/1-10V.

### TECHNICAL DETAILS

Power : 7W/M  
Voltage : DC24V  
CRI > 90  
Led Qty : 480 Chip 's/M  
Cutting Length : 50mm  
Length/Reel : 5M  
Strip Width : 4mm  
Working Temperature : -20~50°C  
Storage Temperature : -30~80°C  
Voltage Range : 23 ~25V dc  
Reverse Voltage : 25V dc


### FIELDS OF APPLICATION

Retail  
Reception areas  
Galleries hotels  
Living spaces


### PRODUCT CHART

Product Code	Rg	Max. Power (W/M)	CCT	Luminous Flux
851020780	96	7	2700K	500
			3000K	520
			4000K	600
			5000K	680
			6500k	800

### Photometric



### DIMENSION

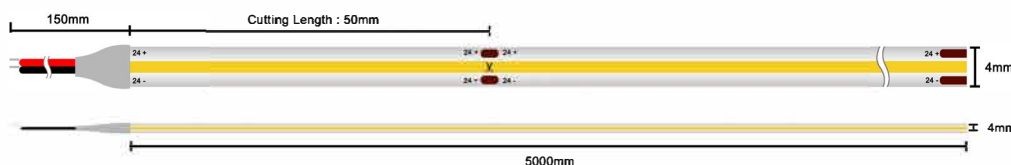

### Standards

EN 60598-1  
EN 60598-2-2  
EN 60598-2-22  
EN 60598-3-2

PCB Width : 4mm  
Strip Width : 4mm  
Strip Height : 4mm


Order Code Ex : 851020780	27
Product Code 851020780	CCT
	27-2700K
	30-3000K
	40-4000K
	50-5000K
	60-6000K
	65-6500K

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C


## ALUMINUM PROFILE LIST

Housing : Extruded aluminium profile with opal PC diffuser and SS clips


### Surface Mounted Profile :

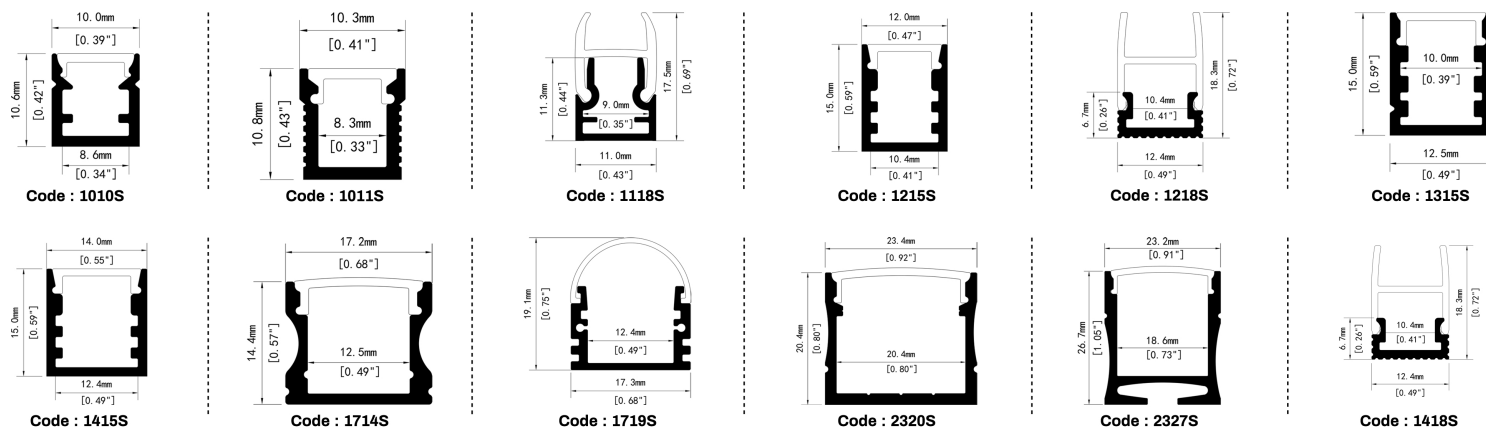


### Recessed Mounted Profile :

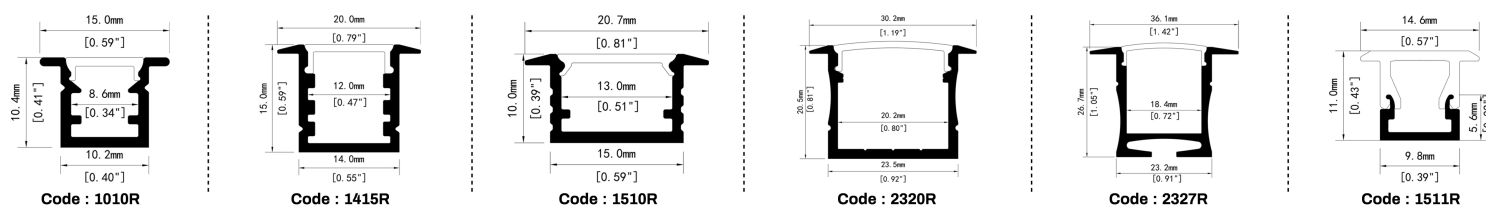


### Angular Mounted Profile :

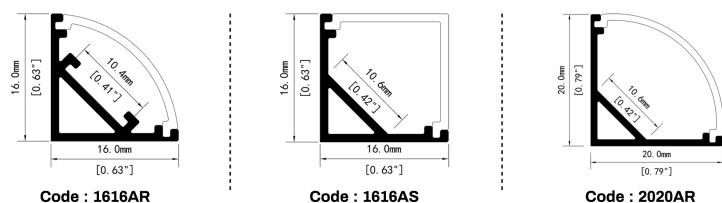

### Staircase Profile :

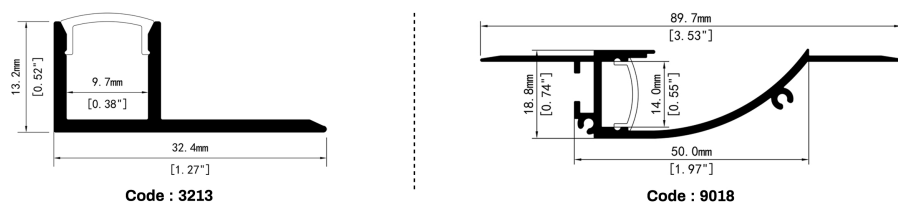


### Trimless Profile :

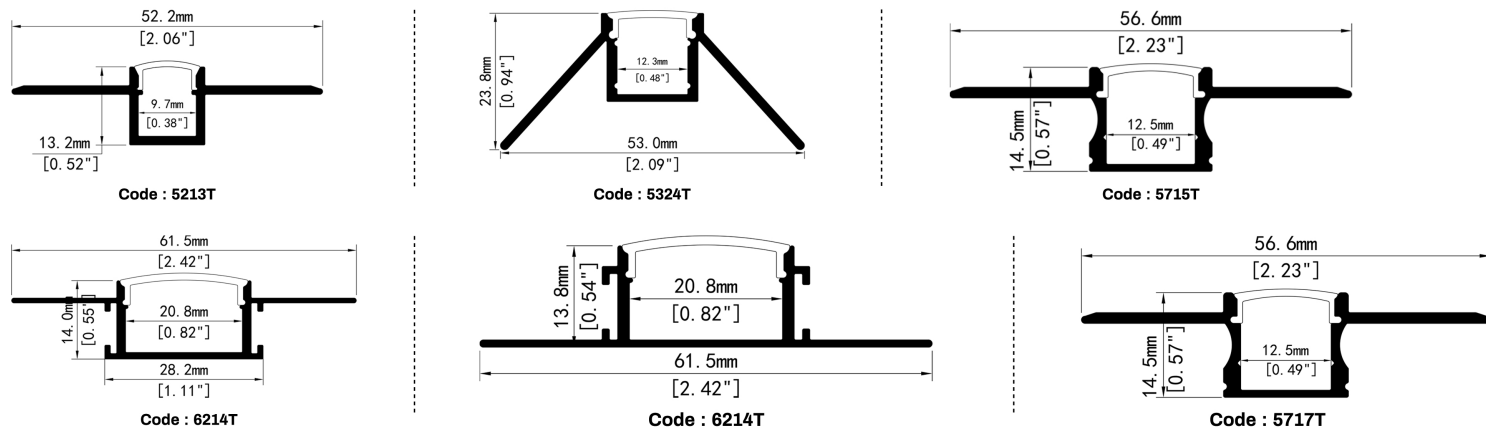


Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of  $25^{\circ}\text{C}$

## WIRING DIAGRAM

**ON/OFF**

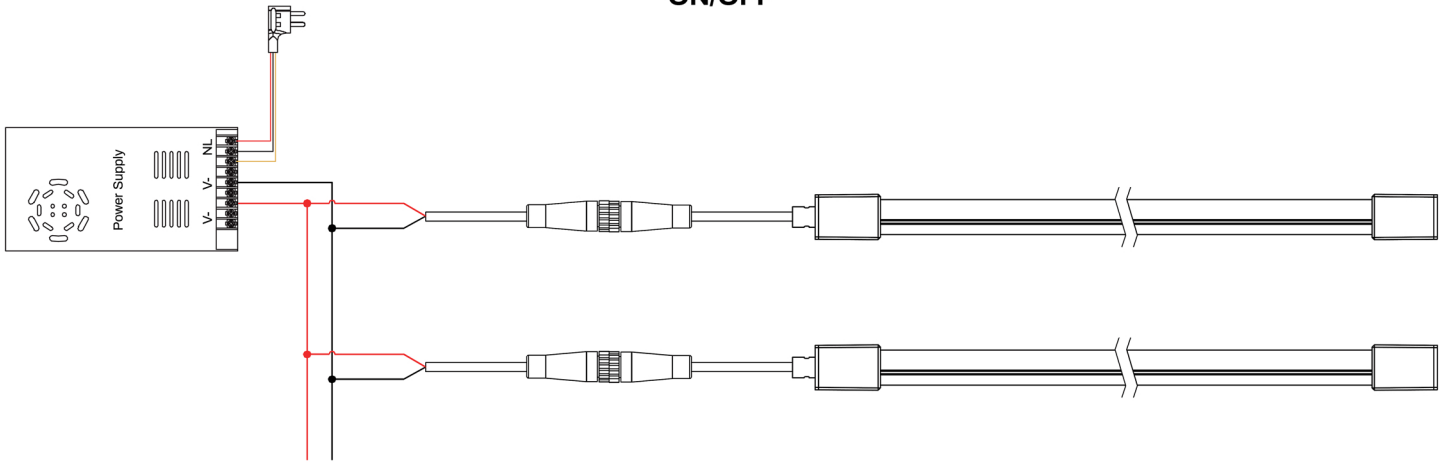


## 1. DALI

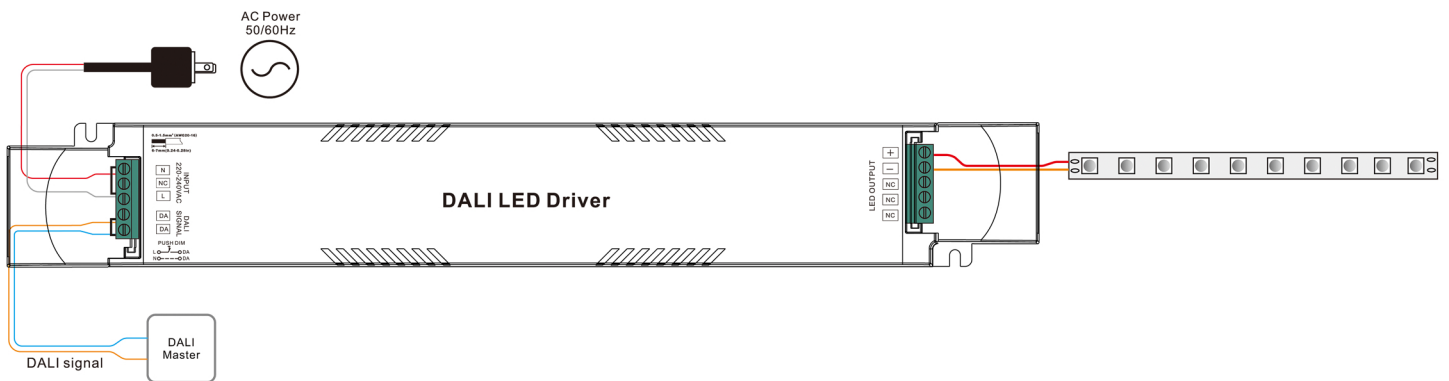


## 2. With Push Dim

L N

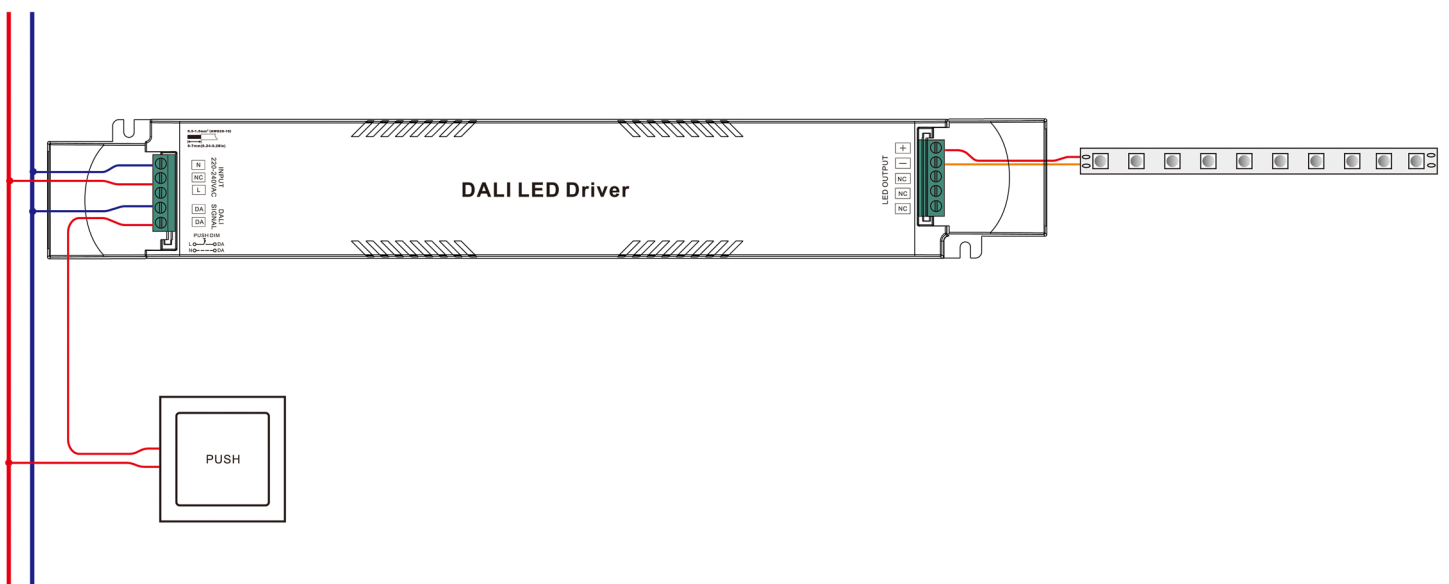


# WIRING DIAGRAM

## 0/1-10V

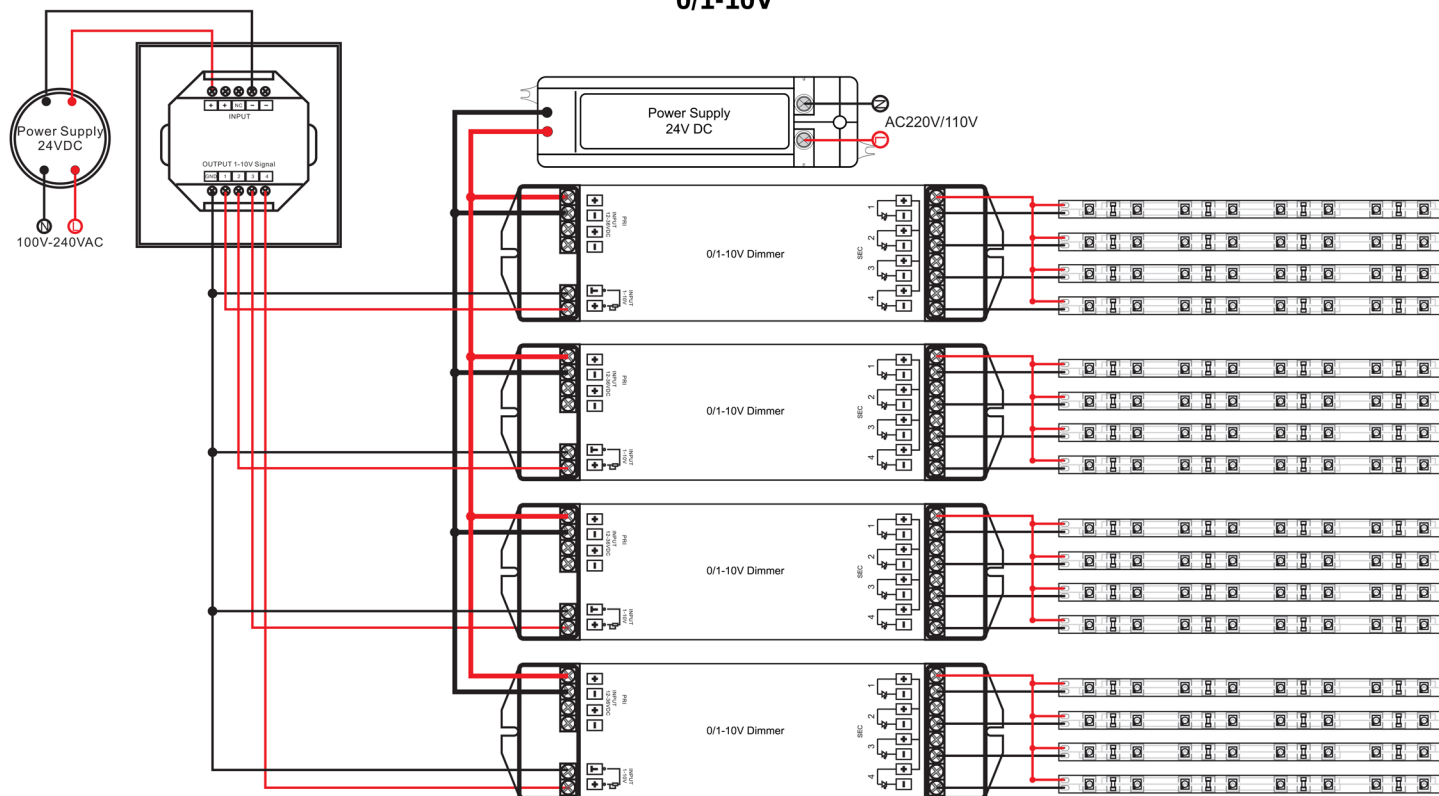

## PHASE CUT

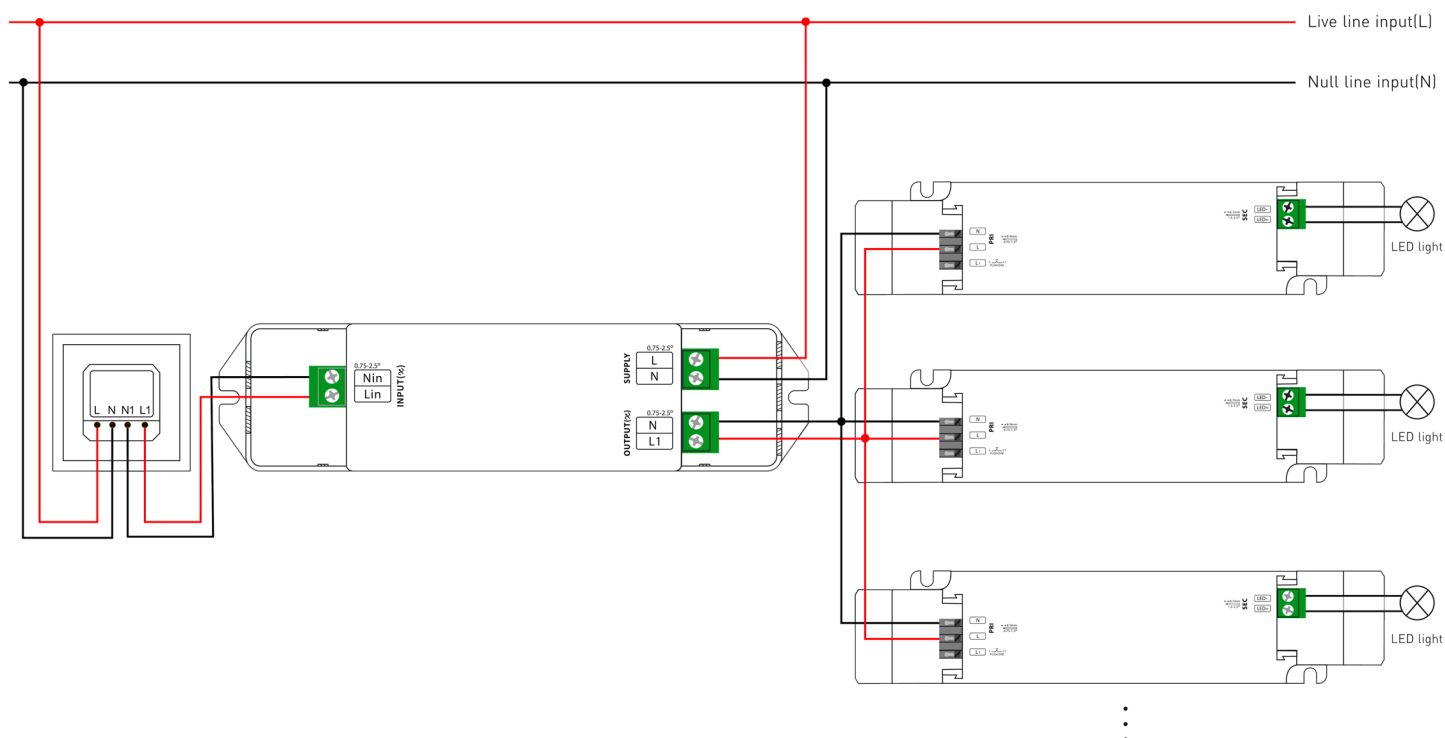




...




## COB Led strip 5mm Mono / White color







### Connector :

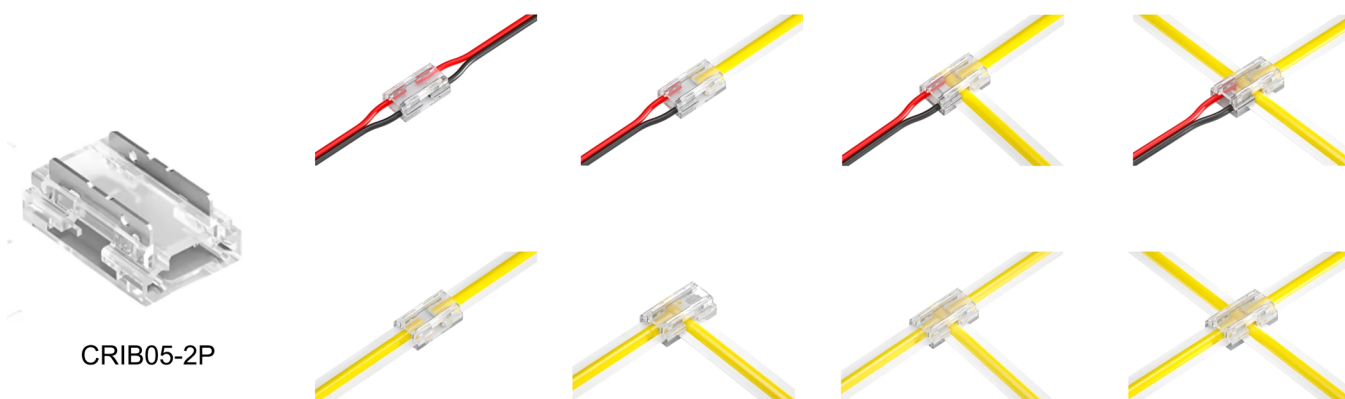► **Hippo-M MINI ( IP20 )** : No soldering needed, operation can be done by normal clamp.  
(Sold Separately)

Product Code	Description	Image
CRIB05-2P-SS	Strip to Strip Joint	
CRIB05-2P-SP22G150	Strip to Power	
CRIB05-2P-SB22G150	Strip to Strip Bridge	




► **Beetle Clip Invisible ( IP20 )** : No soldering needed, 1 connector for 8 types use.  
(Sold Separately)



Product Code	Description	Image
CRIB05-2P-L2	L Shape	
CRIB05-2P	Strip to Strip Joint	
CRIB05-2P-SP20G150	Strip to Power	
CRIB05-2P-SB20G150	Strip to Strip Bridge	
CRIB05-2P-SDC20G150	Strip to DC	
CRIB05-2P-SMA20G150	Strip to Mini AMP	




Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

- **Pluggable Wire Joints** : No soldering needed, operation can be done by normal clamp.  
(Sold Separately)


Product Code	Types	Workable Plugs Picture	Image
PDB-12	1 split 2 way	PWJ-I-2	
PDB-13	1 split 3 way	PWJ-I-2	
PDB-14	1 split 4 way	PWJ-I-2	

## Devices :

- **Dimmable Touch Switch Module** : Sensor.  
(Sold Separately)

Product Code	Description	Image
TSM05-K1	Module with tape only 1PC/Pack	
TSM05-K2	Module with tape and connector 1 PC 5mm board to power 1 PC 5mm board to board 1 PC back tape	
TSM05-20G150-K3	1 PC Module with 150mm input wire soldered 1 PC 5mm board to board connector 1 PC back tape	

- **Smart LED Controller (Bluetooth Module)** : Easily work with our 2~6 pins LED strip connector, remote control via internet.  
(Sold Separately)

Product Code	Light Color	Out Channel	Image
BM-MONO-2P	MONO	2 Pins	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

## **Strip Light Assembly and Safety Information :**

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains).

The following advice must be observed; non-observance can result in the destruction of the LED assembly modules, fire and/or other hazards.


- The LEDLine Flex COB must be operated with a constant-voltage (CV) LED converter.
- Operation only with power supply units that feature the following protection:
  - Short-circuit protection
  - Overload protection
  - Overheating protection
  - SELV (Safety Extra Low Voltage)
- It is imperative to pay attention to the correct polarity when connecting to the LED driver. Wrong polarity may destroy the strip.
- The maximum output of the power supply must be observed.
- Exceeding the max. operating voltage leads to an overload on the LED module. This may result in a reduction of service life or even destroy the LED module.
- The maximum recommended length of a single unit to be driven in series is 5 meters (one complete reel) to ensure consistent output along the complete length. It is possible to increase the total length driven from a single driver by adding additional lengths connected in parallel.
- LED modules and all PCB components must not be subjected to any undue mechanical stress.
- The LEDLine Flex modules must not be operated in rolled-up conditions.
- The circuit path must not be damaged or interrupted.
- During installation the bending radius must not fall below 60 mm. On sharp edges the LEDLine Flex COB IP67 may only be bent at a position where no electronic components or solder parts are mounted. The module can be damaged if it is bent in a crosswise or twisted direction (prevent shear or pull-off forces).
- LEDLine Flex modules are suitable only for mounting on rigid and solid surfaces. The module must not be mounted on flexible substrates as the LED module would be damaged when the substrate bends.
- LEDLine Flex IP67 modules must be installed, handled and bent at a module temperature of between 10 °C to 50 °C.
- Do not use the IP67 LEDLine Flex module in the following environments:
  - Locations containing corrosive inflammable or oxidizing gases such as Cl, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>x</sub>, sulfur, etc.
  - Direct exposure to salt water or organic solvents
  - Exposure to direct sunlight
  - Highly airtight locations
  - Locations subjected to the effects of electric or magnetic fields, intense (continuous) vibration or shock.

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Some Important Highlight points :

- ▶ IP20 : Do not press the surface of LED, Pay attention to damp -proof and dustproof.
- ▶ IP65 : Do not use in strong water waves environment, Can be applied to rainy environment.
- ▶ IP67 : Resist strong water waves impact, Do not apply to underwater environment for a long time.
- ▶ IP68 : Can apply to underwater do not deeper than 1m, No direct sunlight.
  
- Do not tie a knot.
- Do not winding.
- Do not twist.
- Do not cut when it is working,
- Recommended the continuous working time do not exceed 12 hours daily.
- Operating temperature : 20°C~+50°C
- Storage temperature : 0°C~+60°C
- Operated by professionals.
- Pay attention to the application environment.
- IP Level will change after cutting.
- Do not pull and crash.
- Power supply must be connected to ground (GND)
- The minimum bending diameter 60mm
- Power supply retain > 20%
- Note the positive and negative poles.
  
- ▶ For cutting LED strip operation, it is necessary to use the standard accessories e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.




# Installation Manual For strip light

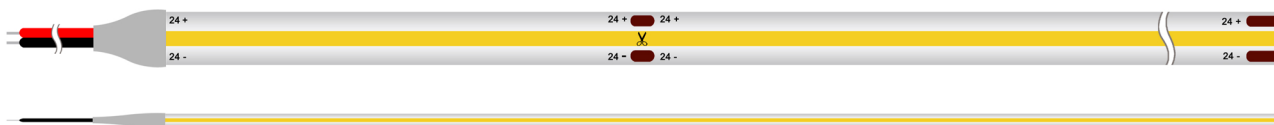

## Safety Information

- Wear anti-static wristbands with earthing terminal or anti-static gloves to handle the products.
- The LED module itself and all its components may not be mechanically stressed.
- Care should be taken to avoid damage to the conducting paths on the circuit board of the LED strip during assembly.
- Do not connect or disconnect the LED strip when the circuit is powered.
- Do not connect the LED strip to the power supply while it is in the packing.
- Please read the installation guide carefully for detailed installation planning.



## Mounting on surface

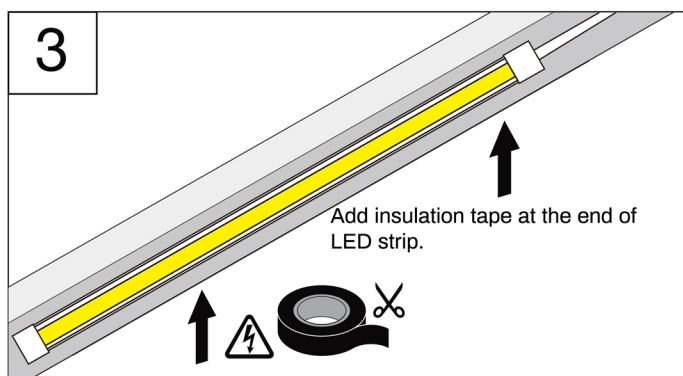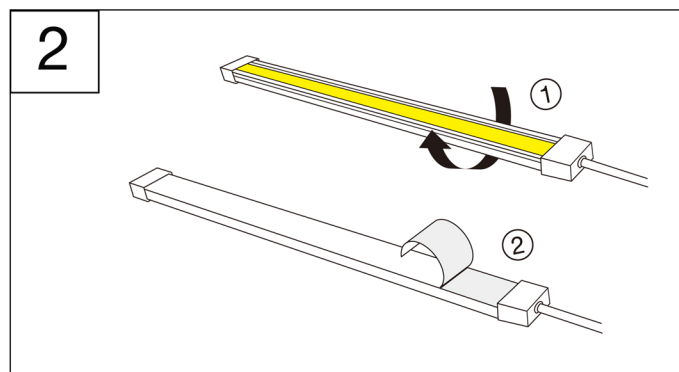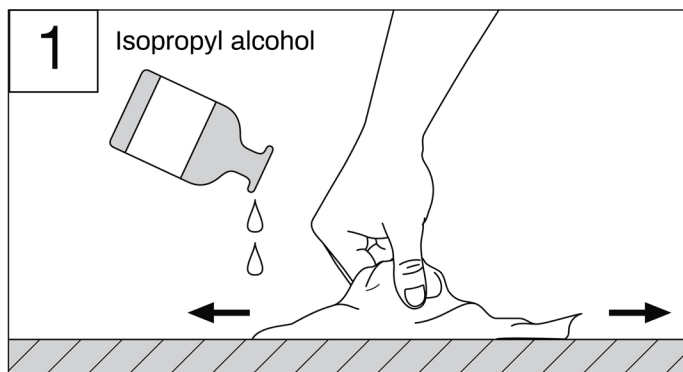

## Do's and Don'ts


Minimum Bending Radius

Do not twist






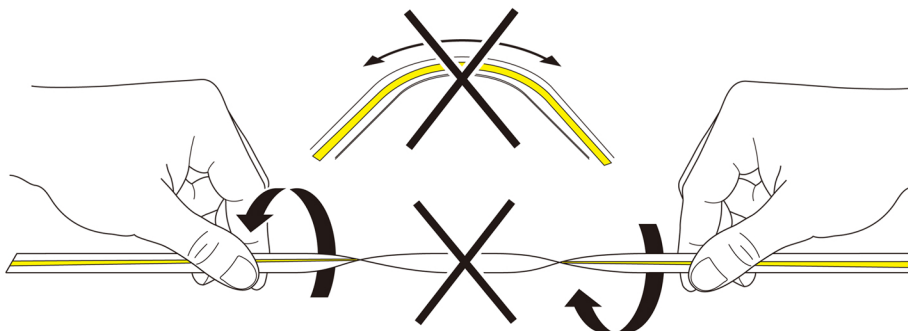
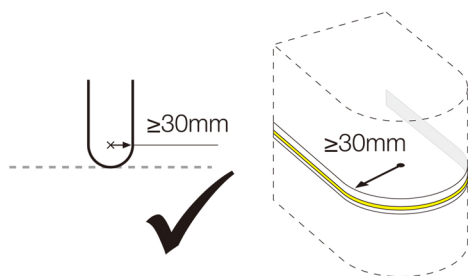


Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Mounting on U-channel

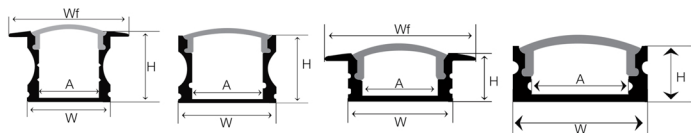


## U-channel for Indoor

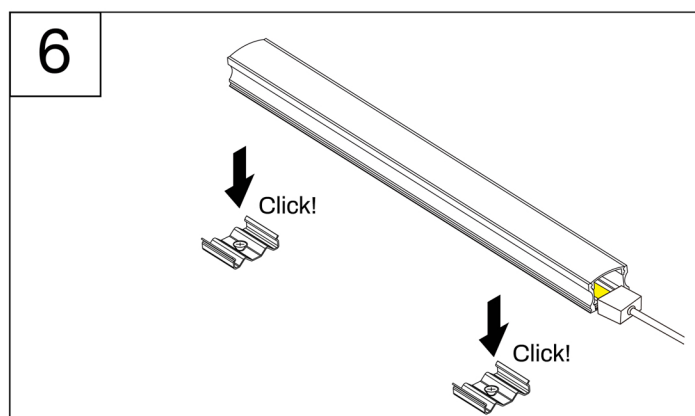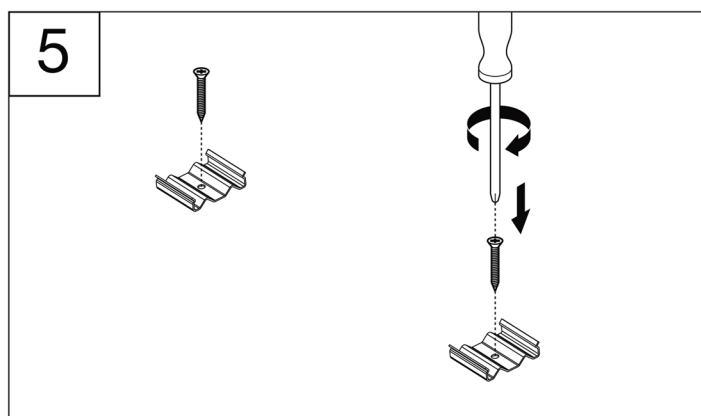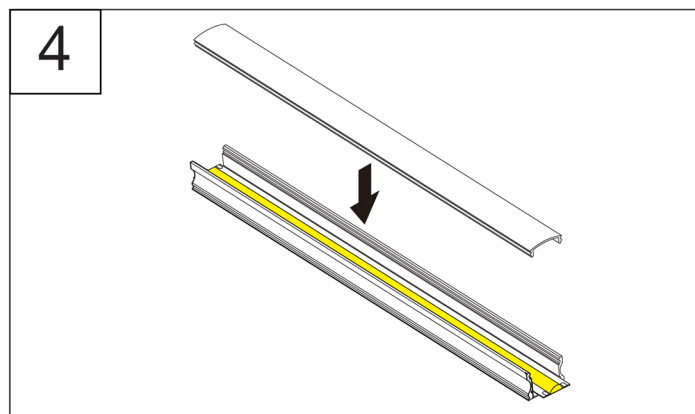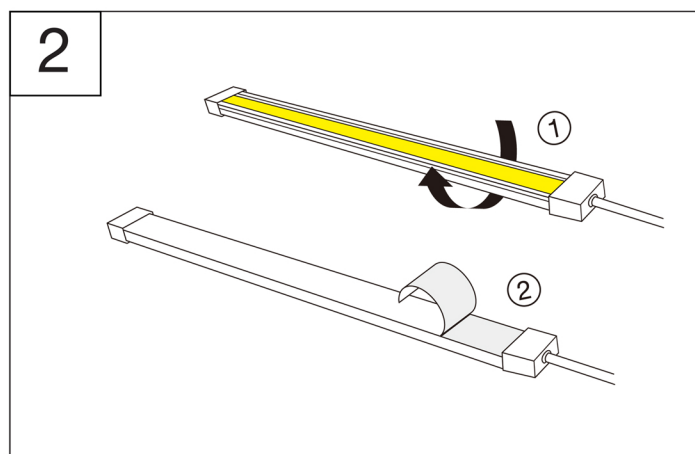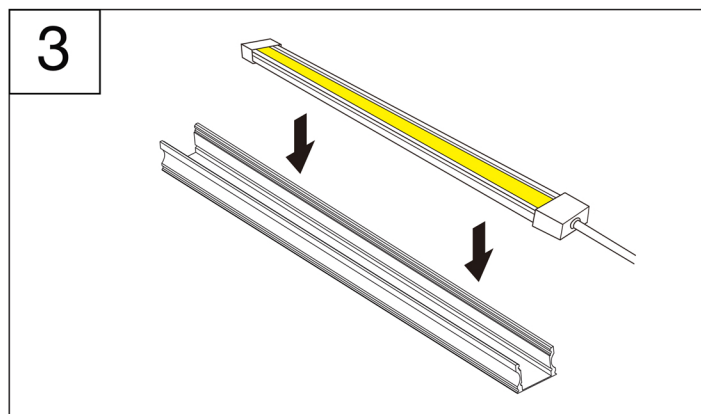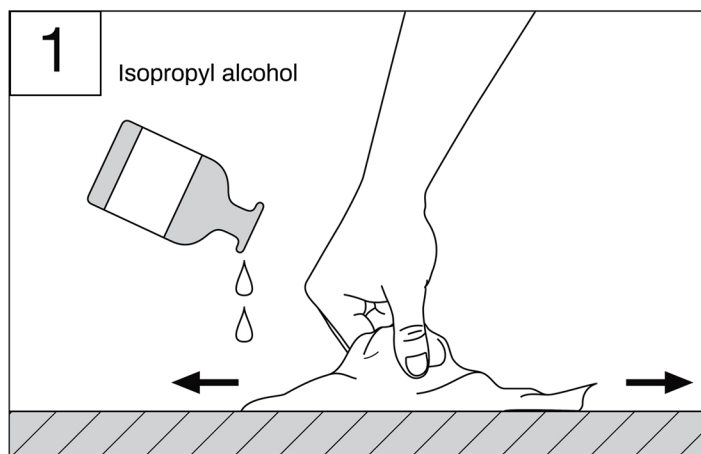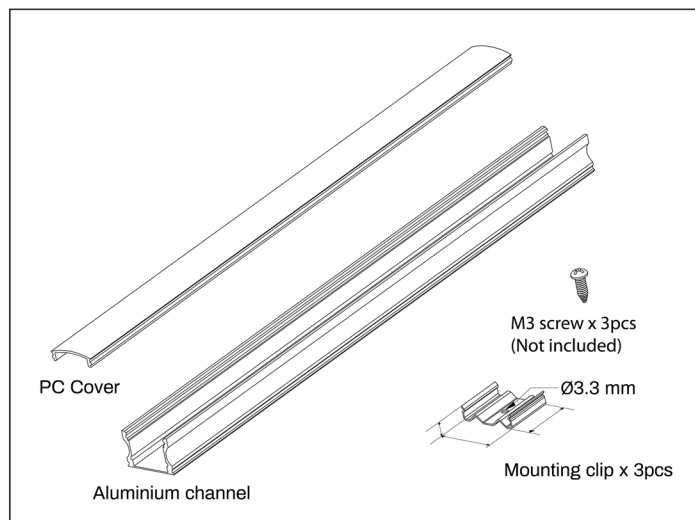








Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C



## Mounting on V-channel



### V-channel for Indoor

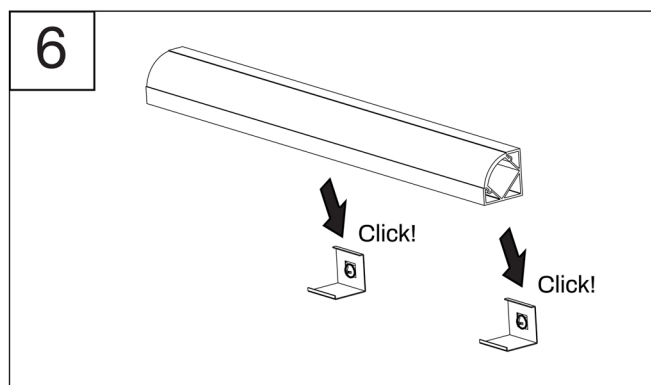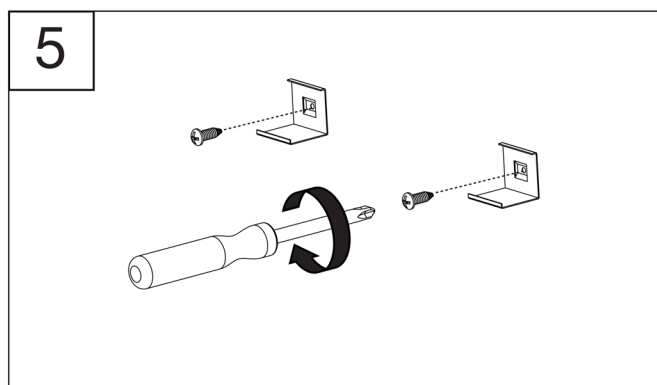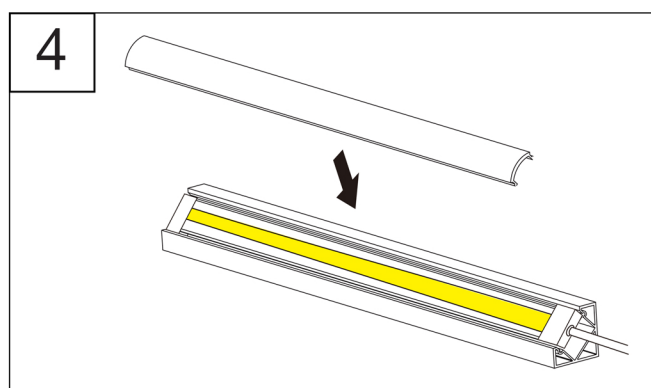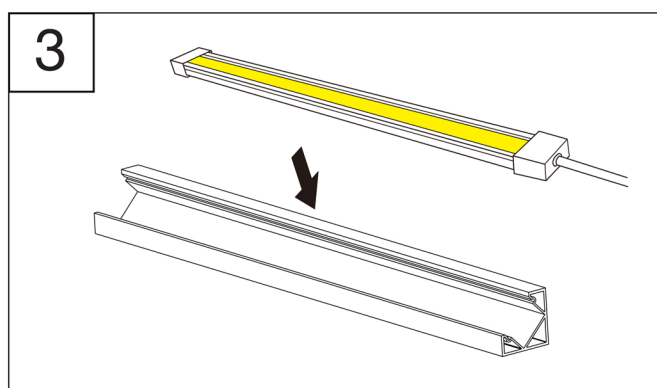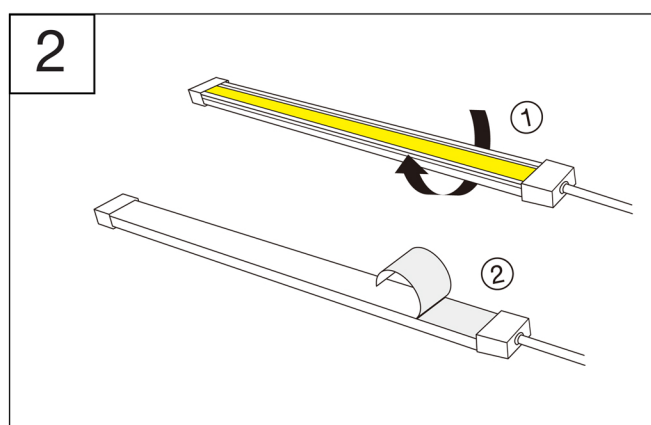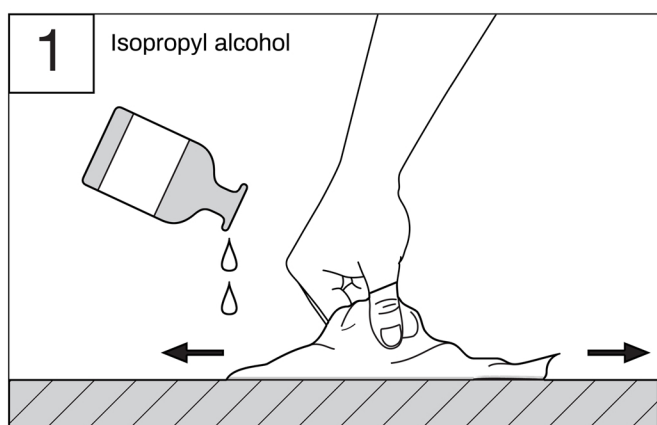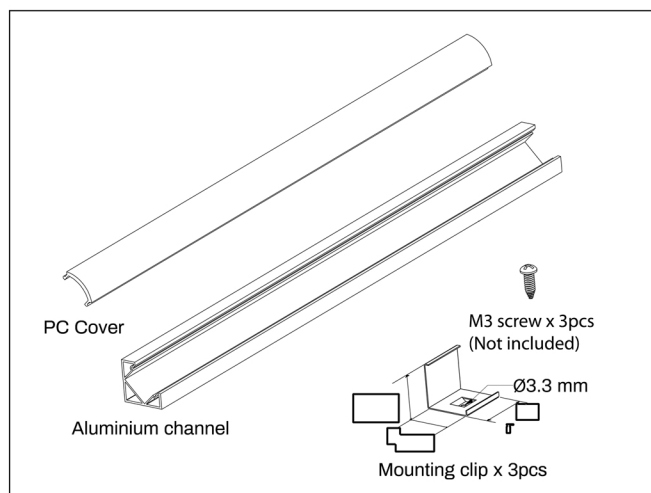

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of  $25^{\circ}\text{C}$