
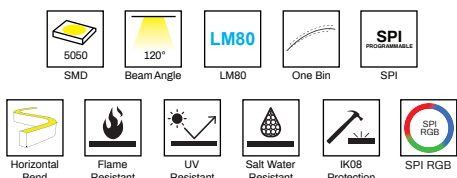


SCUBA SPI RGB

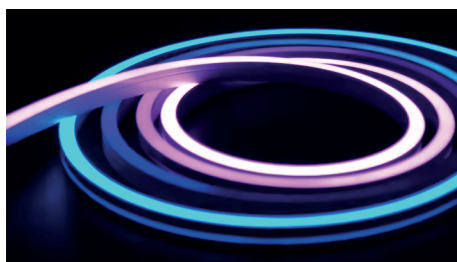

DESCRIPTION:

SCUBA RGB SPI horizontal bend series constructed using Silicon extrusion process. Uniform, dot free light emission, good appearance consistency. Anti-yellowing, high temperature and corrosion resistance, weak acid and alkali resistance UV proof for true outdoor applications. Easy installation with clips and bendable track. Cuttable for Flexible application. Control mode : SPI.

TECHNICAL DETAILS:

Power : 8-15W/M
Voltage : DC24V
CRI >90
Length/Reel : 5M/10M
Cutting length : 100mm
Led Qty : 60LEDs/M
Pixels : 10 pixels/M
Working Temperature : -25~55°C
Storage Temperature : -30~80°C
Voltage Range : 23~25V dc
Reverse Voltage : 25V dc
Warranty : 5 years


LUMENS PER METER:

CCT	8W	13W	15W
R	36lm	60lm	69lm
G	86lm	140lm	161lm
B	23lm	36lm	42lm


INSTALLATION : Horizontal Bend

Product Code : 8771515


DIMENSION:

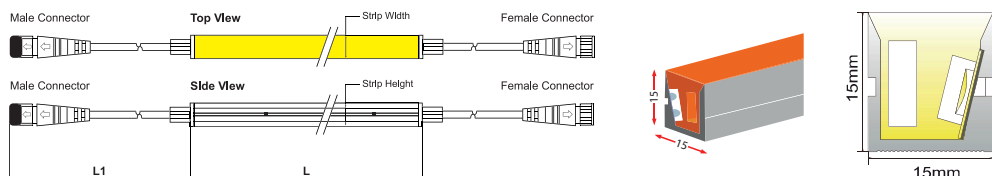


LIGHT DISTRIBUTION:

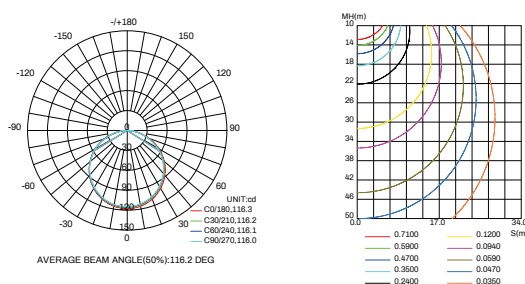

BENDING:

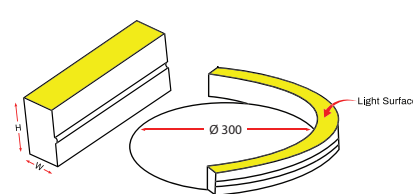

End cap

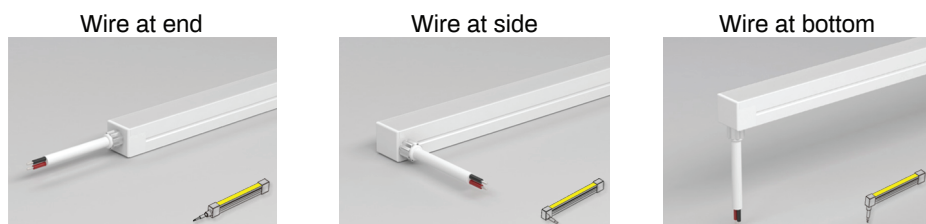


Standards
EN 60598-1
EN 60598-2-2
EN 60598-3-2


Order Code Ex : 8771515	15	88
Product Code 8771515	Power 08-8W	CCT 88-RGB SPI
	13-13W	
	15-15W	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C


ACCESSORIES




Aluminium Profile
Order Code : 8771515-01
Dimension : L1000*W20.5*H17.6mm
Material : aluminium
Color : silver



End Cap 3PIN
Order Code : 8771515-06
Color : white
Cable entry : front/side/bottom
Picture : front



Curved Profile
Order Code : 8771515-02
Dimension : L500*W17*H15mm
Material : stainless steel
Color : silver



Closed End Cap
Order Code : 8771515-07
Material : silicone
Color : white



Mounting Clips
Order Code : 8771515-03
Dimension : L20*W16.6*H12.4mm
Material : stainless steel
Color : silver
Each meter led strips needs
2 clips + 2 screws



IP67 T Type Connector
Order Code : 8771515-08
Wire Gauge : 0.326mm²/22AWG
Protection : IP67 (Mated)



IP67 Connector 3PIN
Order Code : 8771515-04
Wire gauge : 0.326mm²/22AWG
Protection : IP67 (Mated)
Connector type : Male




Scissor
Order Code : 8771515-09




IP67 Connector 3PIN
Order Code : 8771515-05
Wire gauge : 0.326mm²/22AWG
Protection : IP67 (Mated)
Connector type : Female

ADDITIONAL INFO

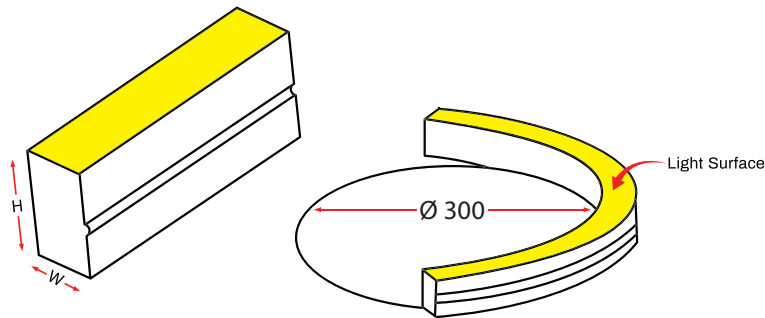

- ▶ Please light it up for a quick check before installation.
- ▶ Bending diameter of SCUBA RGB SPI 1515 is 300mm, do not bend to Top direction, or bend too sharp or twist. If bend it wrongly, PCB inside will be damaged and the lighting fixture will not turn on.
- ▶ During installation, please make sure there are at least two workers to cooperate together and strictly follow the instruction manuals.
- ▶ product itself for 5 years from the date of purchase. This warranty does not cover failures due to abuse, misuse, improper handling, act of nature, negligence, normal wear, accidental damage, repairs made by the purchaser or incorrect voltage conditions.

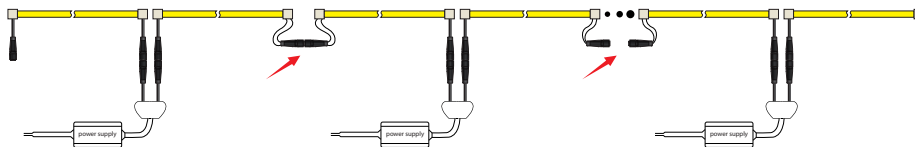



Note:

- 8W/M Max. 10mtr run length to single side feed.
- 13W/M Max. 7mtr run length to double side feed.
- 15W/M Max. 7mtr run length to double side feed.

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 5%.

WIRING DIAGRAM

SPI

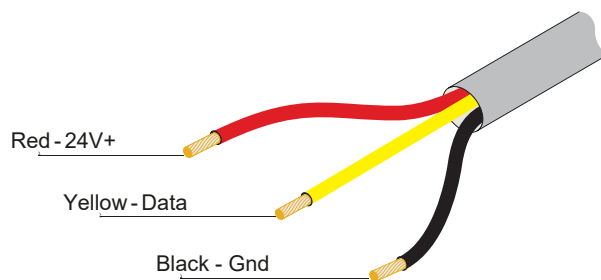
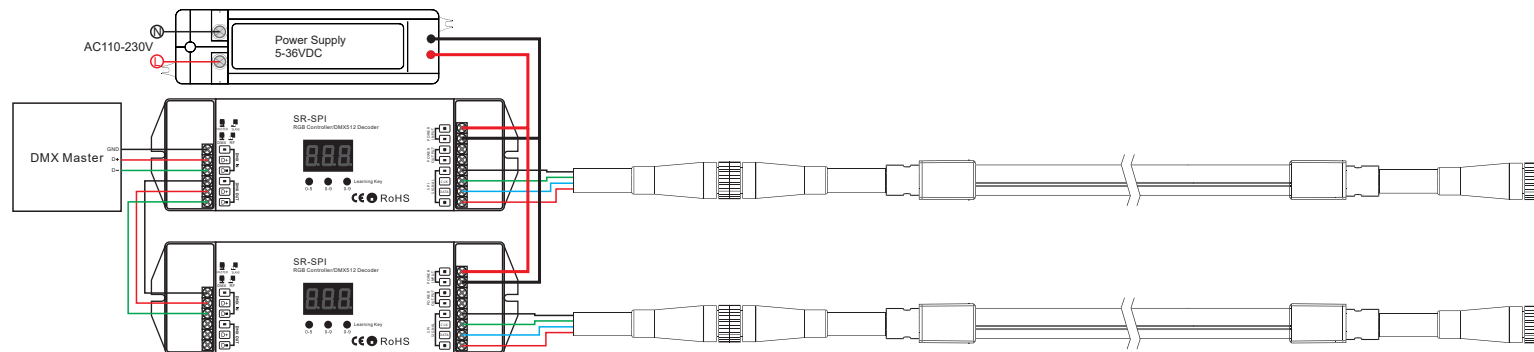


GENERAL MOUNTING


LED neon flex can be fastened to surfaces using appropriate accessories available from distributor. Please refer to data sheets or contact technical support for a copy. The use of glues and resins as fixing agents should be avoided. Use of glues and resins may invalidate the warranty of the product unless its use is agreed in writing by distributor as part of a detailed project specification.

The images indicate one type of fixing available in the accessories range. The different fixings serve obvious purposes, however when in doubt technical support should be contacted.



Quantities of accessories and fixings are dependent on the type and its effect on the variant it's being used with. Care should be taken to ensure drooping is avoided, and to ensure that is fastened adequately to avoid stresses on itself.

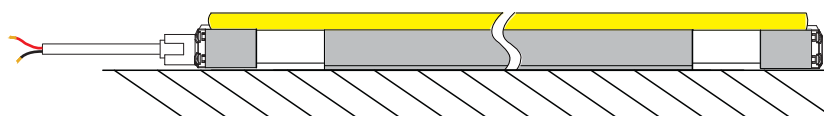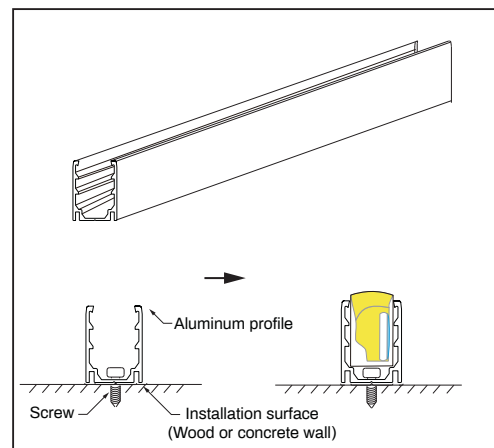


Press the flex light into mounted aluminum channel in one direction.

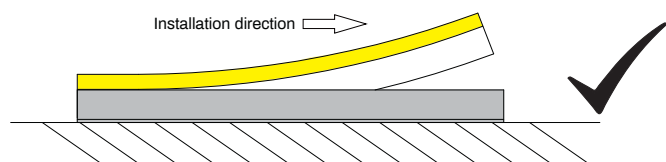



Incorrect installation like below picture could lead to light failure.

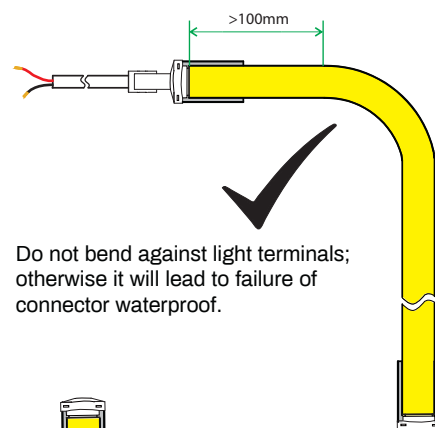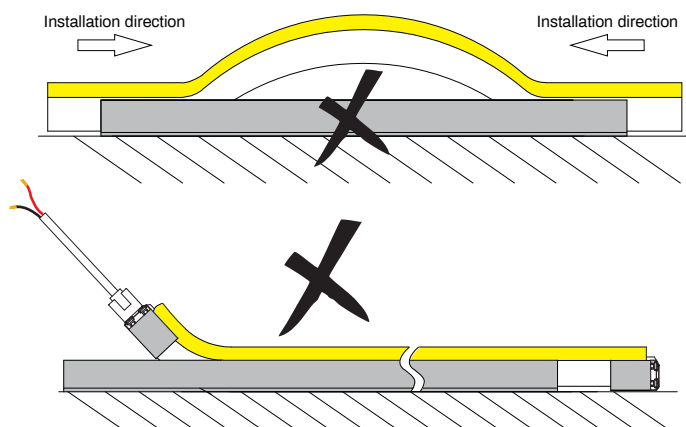


Do not bend against light terminals; otherwise it will lead to failure of connector waterproof.

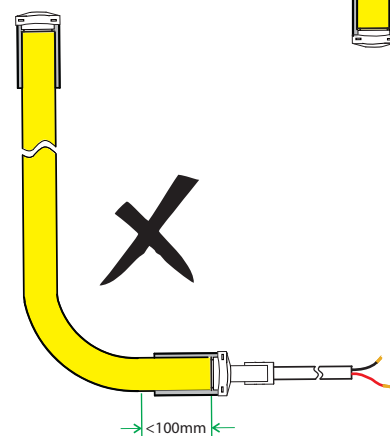

Ensure the feeding cable not bear force, keep the head 10mm in natural loose.

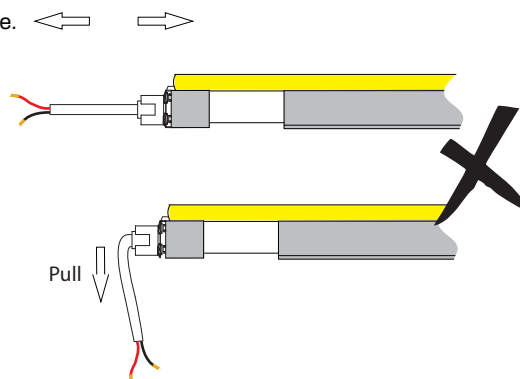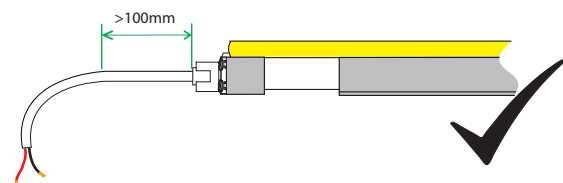


Mount the cable junction in hermetic enclosure like waterproof junction box in outdoor application.

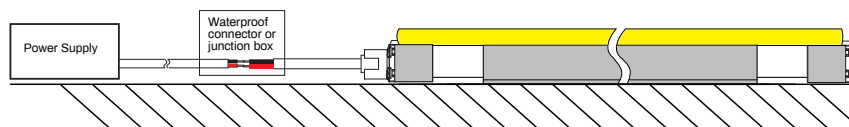


INSTALLATION

Attention


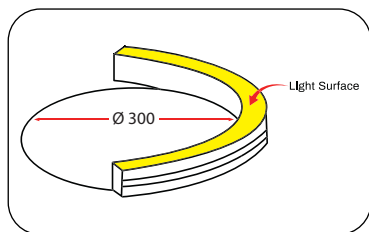


1. Correct bending way.



Installation

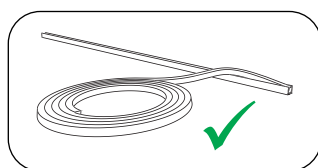



1. During LED strip installation, ensure to uncoil the strip loop by loop and maintain perpendicular alignment with the mounting profile. Avoid twisting or knotting of the strip at all times.

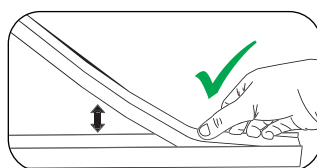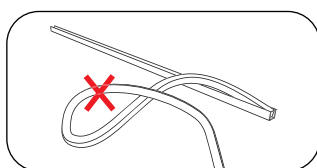


2. Align the LED strip with the opening of the profile, gently lift and press the strip into the profile, and strictly avoid excessive bending or lifting of the strip.

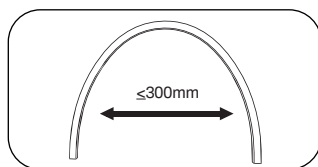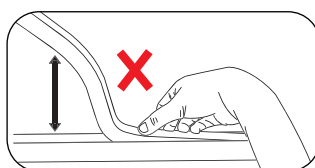

3. Align the LED strip with the opening of the profile, gently lift and press the strip into the profile, and strictly avoid excessive bending or lifting of the strip.

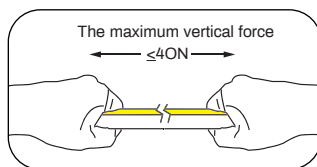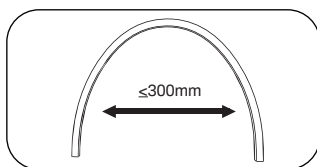


The safe tensile force for the LED strip shall be $\leq 40N$. Excessive force may damage the internal circuitry.

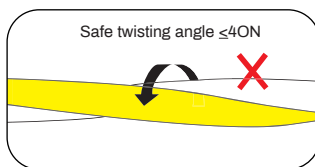


The safe twisting angle for the LED strip shall not exceed 180° .


Warning sign

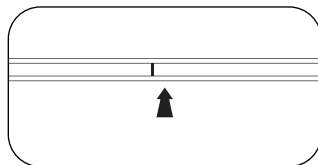


Cuttable Marking Area (on the bottom or side of the product).

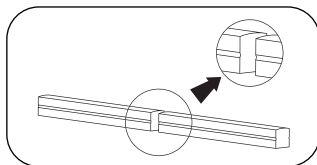


Neat and smooth cut.

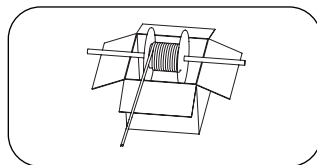


Mount the roll on a rod over the box and rotate to use.

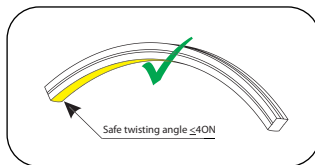


Top Bend.

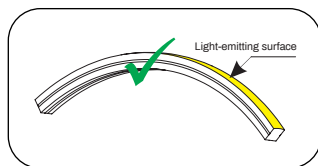


Side Bend.

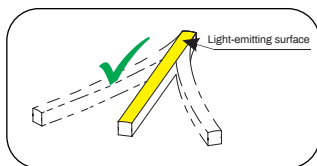


Free Bend.

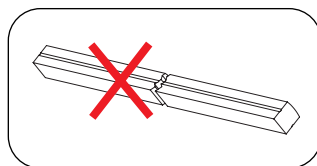


Do not leave uneven cuts.

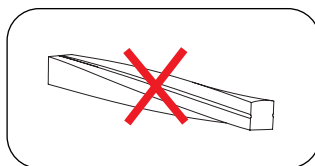


Do not twist during use.

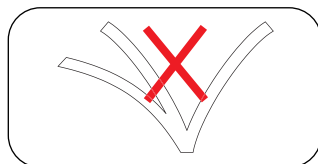


Repeated bending may damage electronic circuits.

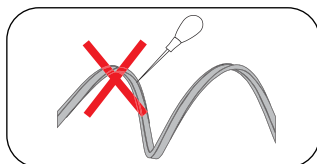

Do not puncture or scratch with sharp objects.

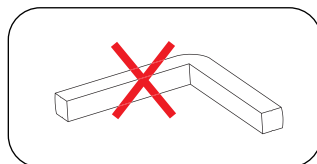

Do not bend at sharp angles.

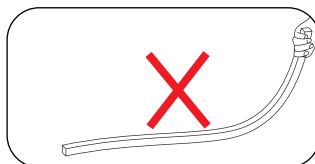

Do not jerk or yank when using the product.

1. The cutting marks are located on the PCB. Refer to the product cutting line window or laser markings on the surface to identify the trimming position.
2. During transportation and application, please observe the above warning labels. Proper handling ensures optimal performance and user satisfaction.