



ARMI



Suitable Accessories



Features:

ARMI Track Light, Simple and modern designed, housing Die Cast Aluminum, with PMMA Optics.

Available with flexible legs allow the fixture to swivel, adjust and straighten out to meet a variety of depths and complexity of slotted spaces.

The special construction means that no drop off, no matter how it is adjusted.

Universal line voltage led track lighting heads, it in 3 phase 4 wires track systems, and 5 phase 6 wires DALI track system.

Flexible adjustable beam angles, with high efficiency heat dissipation.

For enhanced customization, various CRI (Color Rendering Index) and CCT (Correlated Color Temperature) options are available upon request, allowing designers to create the perfect lighting atmosphere.

The product also available with a range of accessories, including a honeycomb louvre for superior glare control, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity. This combination of refined design, advanced optics.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 20-24W

High Lumen: 95lm/w

3 STEP Mac Adam

High efficiency, low Flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10).

Fields of Application:

Commercial places

Galleries hotels

Car displays

Museums

Restaurants

Clothing shops

Furniture Shops

Installation Method:

On an electrified track or special base.

Wattage(W)	:	20	24			
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	14°	28°	40°	50°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	


*Special Color and Finish on request

Product Code (96507424):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Length of Arm
20	1900LM	73x125	70-150
24	2280LM	73x125	70-150

*Luminous Lux value is calculated for 4000K and CRI>90

Photometric:

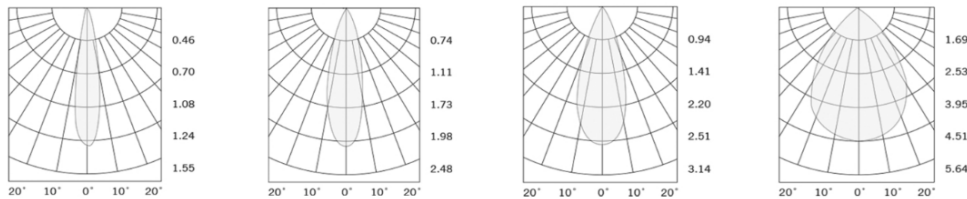

Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96507424 27K 14D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	14D - 14°	8->80	1 - ON/OFF	W-White
30K - 3000K	28D - 28°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	40D - 40°		3 - DALI	
50K - 5000K	50D - 50°		4 - Phase Dimming	
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C