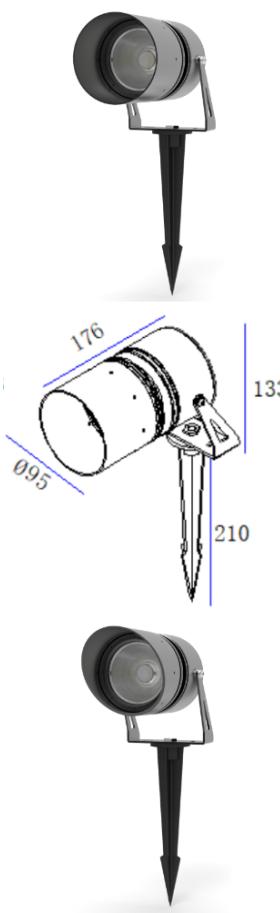


## BASK

**Description:**

BASK is a outdoor spot / spike light for accent and general illumination with low as well as high power LED light sources, excellent heat dissipation.

Adapts high durability, weather-resistant housings suitable for outdoor use. Excellent heat dissipation. It include features such as corrosion resistance, dustproof, anodized and polished, sandblasted, not easy to rust and fade.

Toughened glass surface, with high hardness, not easy to break.

It also comes with a hood, different CCT and various beam angles this family is a perfect solution to the requirement.

It has very wide application like trees, sign terraced landscape, urban lighting, internal and external walls of buildings, etc.

**Product Specifications:**


Housing : Die cast aluminum  
 Coating: Powder Coating  
 Glass : Toughened Glass  
 Lamp Type : COB  
 Gasket: Molding shaped silicone seal  
 Lens/Reflector : Optical lens (efficiency>90%)  
 Power Cable: 0.5 mt. power cable included  
 Driver : High efficiency, low flicker driver  
 Installation Type: Surface Mounted / Spike  
 Adjustable: Yes

**Technical Specifications:**

Wattage: 16W  
 Voltage: 220-240VAC  
 Frequency: 50-60Hz  
 Light Source: OSRAM/EPISTAR/CREE  
 Lumen: 90lm/W  
 Mac Adam: 3 Step  
 Safety Class: I  
 Working Temperature:-20°C to 55°C  
 Life Time: 50,000hrs (L80/B10) at 35°C  
 Warranty: 5 Years

**Parameter:**

Wattage(W)	:	16W
Finish	:	Grey (G) / Black (B) / Customized (C)
Kelvin*	:	2700K / 3000K / 4000K / 6000K
Beam Angle	:	15° / 25° / 38° / 50°
CRI	:	80+
Control Mode	:	ON/OFF / DALI / 0 / 1-10V

**Photometric :**

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
541095	16 - 16W	27-2700K	A - 220 - 240VAC	13 - 13°	G-Grey	1-ON/OFF
		30-3000K		25 - 25°	B- Black	2-DALI
		40-4000K		38 - 38°	C-Customized	3-0/1-10V
		60-6000K		50 - 50°		

Ex: Order Code: 5410951627A'13G1

**Standards :**

EN 60598-1

EN 60598-2-2

EN 60598-3-2

EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C