


BETH



Description:

BETH is small wattage inground light typically feature glass cover, durable, weather-resistant housings suitable for outdoor use. Excellent heat dissipation.

Constructed from high-quality Die Cast Aluminum with a robust 316 stainless steel face cover, it offers exceptional strength and long-term resistance to corrosion.

Toughened glass surface not easy to break.

It comes with different CCT, various beam angles and C5 marine Grade Coating optionally, this family is a perfect solution to the requirement.

Perfect for pathways, facades, gardens, plazas, and architectural accent lighting.

Product Specifications:

Front cover : Stainless Steel 316
Housing : Die cast aluminum
Coating : Powder Coating
Diffuser : Tempered glass
Light Source : OSRAM / CREE
Gasket : Moulding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable : 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type : Inground
Adjustable : No

Technical Specifications:

Wattage : 1W
Voltage : 24VDC
Frequency : 50-60Hz
Lumen : Single Color (3000K) - 42lm/W
RGBW (3000K) - 35lm/W, RGB - 28lm/W
Mac Adam : 3 Step
Safety Class : III
Working Temperature : -20°C to 55°C
Life Time : 50,000hrs (L80/B10) at 35°C
Warranty : 5 Years

Parameter:

Wattage(W)	: 1W
Finish	: Stainless Steel 316
Kelvin*	: 2700K / 3000K / 3500K / 4000K / 6000K / RGB / RGBW
Beam Angle	: 15° / 24° / 36°
CRI	: 90+ 95+
Control Mode	: ON/OFF / DALI / Casambi / DMX

*Lumen values are calculated at 36° beam angle, 3000K color temperature and CRI 90.

Order Code:

Product	Code	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
544025	01 - 1W	27 - 2700K	D - 24VDC	15-15°	SS-Stainless Steel 316	1-ON/OFF	
		30 - 3000K		24-24°		2-DALI	
		35 - 3500K		36-36°		3-Casambi	
		40 - 4000K		4-DMX			
		60 - 6000K					
		82 - RGB					
		83 - RGB DMX					
		92 - RGBW					
		93 - RGBW DMX					


Ex: Order Code: 5440250127D'15SS1

Standard :

EN 60598-1
EN 60598-2-2
EN 60598-3-2
EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Photometric:

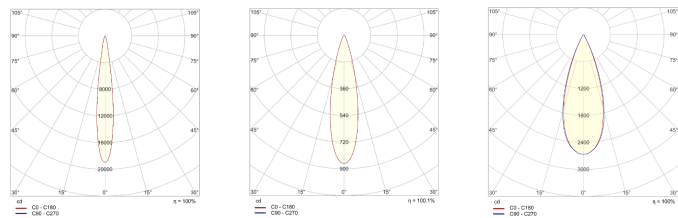

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C