


BETH



Description:

BETH is small wattage inground light typically feature glass cover, durable, weather-resistant housings suitable for outdoor use. Excellent heat dissipation.

Constructed from high-quality Die Cast Aluminum with a robust 316 stainless steel face cover, it offers exceptional strength and long-term resistance to corrosion.

Toughened glass surface not easy to break.

It comes with different CCT, various beam angles and C5 marine Grade Coating optionally, this family is a perfect solution to the requirement.

Perfect for pathways, facades, gardens, plazas, and architectural accent lighting.

Product Specifications:

Front cover : Stainless Steel 316
Housing : Die cast aluminum
Coating : Powder Coating
Diffuser : Tempered glass
Light Source : OSRAM / CREE
Gasket : Moulding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable : 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type : Inground
Adjustable : No

Technical Specifications:

Wattage : 12W
Voltage : 24VDC
Frequency : 50-60Hz
Lumen : Single Color (3000K) - 58lm/W
RGBW (3000K) - 47lm/W, RGB - 42lm/W
Mac Adam : 3 Step
Safety Class : III
Working Temperature : -20°C to 55°C
Life Time : 50,000hrs (L80/B10) at 35°C
Warranty : 5 Years

Parameter:

Wattage(W)	:	12W
Finish	:	Stainless Steel 316
Kelvin*	:	2700K / 3000K / 3500K / 4000K / 6000K / RGB / RGBW
Beam Angle	:	15° / 24° / 36°
CRI	:	90+ 95+
Control Mode	:	ON/OFF / DALI / Casambi / DMX

*Lumen values are calculated at 36° beam angle, 3000K color temperature and CRI 90.

Order Code:

Product Code	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
544075	12 - 12W	27 - 2700K	D - 24VDC	15-15°	SS-Stainless Steel 316	1-ON/OFF
		30 - 3000K		24-24°		2-DALI
		35 - 3500K		36-36°		3-Casambi
		40 - 4000K				4-DMX
		60 - 6000K				
		82 - RGB				
		83 - RGB DMX				
		92 - RGBW				
		93 - RGBW DMX				


Ex: Order Code: 5440751227D'15SS1

Standard :

- EN 60598-1
- EN 60598-2-2
- EN 60598-3-2
- EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Photometric:

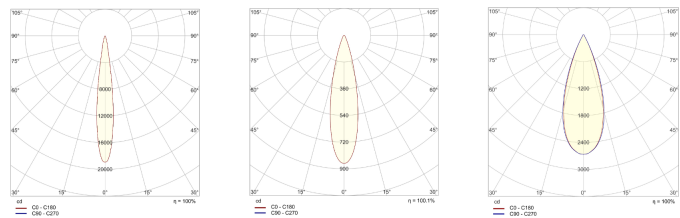

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C