


## BOLE-M



### Description:

Bole-M is a high-quality bollard made of stretched aluminum, die-cast aluminum, and PC optical components.

Its exquisite surface treatment provides good weather resistance with an IP65 protection grade. Its has three key advantages: anti-glare lighting, wide irradiation range, and excellent illumination uniformity.

Its usage is ideal for lawns and pavements in parks, squares, villas and couyards.

Available Height Options: 290mm and 690mm.

### Product Specifications:

Housing : Die cast Aluminium  
 Diffuser : Polycarbonate  
 Coating: Powder Coating  
 Net Weight : 2.2KG  
 Gasket: Moulding shaped silicone seal  
 Power Cable: 0.5 mtr. power cable included  
 Driver : High efficiency, low flicker driver  
 Installation Type: Surface Mounted  
 Adjustable: No  
 Warranty: 5 Years

### Technical Specifications:

Wattage: 6.5 - 12W  
 Voltage: 200-240V AC  
 Frequency: 50-60Hz  
 Light Source: Bridgelux / OSRAM  
 Lumen: 50lm/W  
 Mac Adam: 4 Step  
 Safety Class: I  
 Working Temperature:-30°C t o 45°C  
 Life Time: 50,000hrs (L80/B10) at 35°C

### Parameter:

Wattage(W)	:	6.5W / 12W
Finish	:	Black (B) / White (W) / Silver (S) / Grey (G)
Kelvin*	:	3000K / 4000K
Beam Angle	:	360°
CRI	:	80
Control Mode	:	ON/OFF / DALI


### Standards :

EN 60598-1  
 EN 60598-2-2  
 EN 60598-3-2  
 EN 60598-3-3

### Order Code:

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
547102	6.5-6.5W	30-3000K	A-200-240VAC	360°	B-Black	1-ON/OFF
	12-12W	40-4000K			W-White	2-DALI
					S-Silver	
					G-Grey	
						5471026.530A'360°B
Ex: Order Code: 1						

## Photometric:

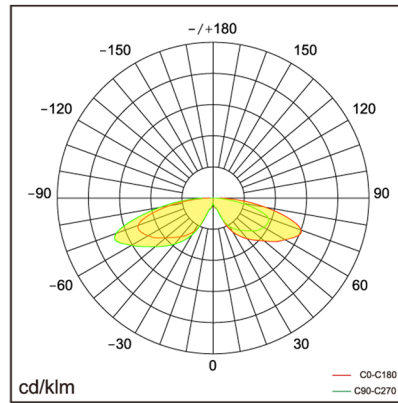

Beam Angle: 360D

## Accessories:



J Anchor Bolt Kit

Φ120x200mm



Expansion screw

M6-Φ8x80mm



M682-B(3P)

IP68 Waterproof connector

72x21mm



M684-B(5P)

IP68 Waterproof connector

99x25mm



M685-Y

IP68 Waterproof connector

140x72mm

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C