


BOLE-S

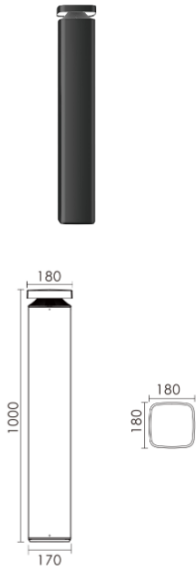

Description:

Bole-S is a range of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and PC optical concept. Sophisticated surface finish gives a high end appearance of texture thanks to perfect powder coating.

Our bollards have IP65 certificate tough weather conditions, resistance seawater and corrosion. The professional optical solution offers a fully anti-glare and comfortable light uniformity.

Main uses architectural addition to important business and commercial buildings, corporate headquarters, parks, recreational areas and gardens.

It is available in Round / Square / Mushroom designs, and each design has 250mm, 600mm, 1000mm height.

Product Specifications:

Housing : Die cast Aluminium
Diffuser : Polycarbonate
Coating: Powder Coating
Net Weight : 5.35KG
Gasket: Moulding shaped silicone seal
Power Cable: 0.5 mtr. power cable included
Driver : High efficiency, low flicker driver
Installation Type: Surface Mounted
Adjustable: No
Warranty: 5 Years

Technical Specifications:

Wattage: 12-24W
Voltage: 200-240V AC
Frequency: 50-60Hz
Light Source: Bridgelux / OSRAM
Lumen: 45lm/W
Mac Adam: 4 Step
Safety Class: I
Working Temperature: -30°C to 45°C
Life Time: 50,000hrs (L80/B10) at 35°C

Parameter:


Wattage(W)	:	12W / 24W
Finish	:	Black (B) / Silver (S)
Kelvin*	:	3000K / 4000K
Beam Angle	:	360°
CRI	:	80
Control Mode	:	ON/OFF / DALI / Bluetooth

Order Code:

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
547183	12-12W	30-3000K	A-200-240VAC	360-360°	B-Black	1-ON/OFF
	24-24W	40-4000K			S-Silver	2-DALI
						3-Bluetooth

Ex: Order Code: 5471831230A'360B1

Photometric :



Standards :

EN 60598-1
EN 60598-2-2
EN 60598-3-2
EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C