


BOX



Features:

Surface mounted downlight with twin heads as light source.
 The lamp body adopts high-pressure Die-cast aluminum.
 Acrylic optical lens, good light transmittance, can make the light shine evenly on the object.
 Available 30° adjustable.
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 7- 15 W
 High Lumen: 110lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Surface Mounted

Wattage(W)	:	7	10	15	
Finish	:	White(W)	Black(B)		
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	15°	24°	38°	
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (97810015):

Wattage	Lumens(lm)	Dimension(LxWxH) mm
7	840LM	100X100X100
10	1100LM	100X100X100
15	1650LM	100X100X100

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

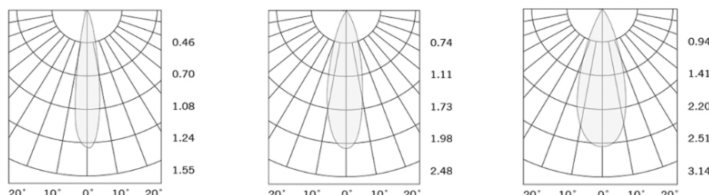

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 97810015 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	38D - 38°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C