


BRACKO



Features:

Simple and easy appearance, in line with contemporary aesthetic concept.
Aluminum Die-cast body, stable heat dissipation and more durable.
High reflectance aluminum reflector for extend long service lifetime.
Uniform spot transition without residual light.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 6 W
High Lumen: 110lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces

Installation Method:

Recessed

Wattage(W)	:	6				
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	
Beam Angle	:	19°	25°	40°		
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96705506):

Wattage	Lumens(lm)	Dimension(ØxH) mm	Cut out  (mm)
6	660LM	55x58.5	50

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

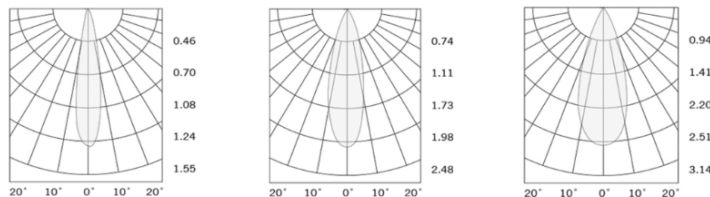

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96705506 27K 19D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	19D - 19°	8->80	1 - ON/OFF	W-White
30K - 3000K	25D - 25°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	40D - 40°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C