

## BRAGO



### Features:

BRAGO Recessed Downlight, high quality of die cast aluminum body, ensuring superior durability and excellent heat dissipation. It features a precision lens designed for optimal light output and minimal glare.

This Product is available with Customizable Reflector that Offers a range of reflector finishes to suit different aesthetic preferences, cement ash, iron ash, oil red, silver and orange, Electroplated outer ring with different options finishes, pearl silver, gun black, rose gold, bright black, Bright Silver, gold.

The outer ring comes in three distinctive design styles to complement various design preferences: arc/inner slope/step, and the outer ring is electroplated, giving it a premium, polished finish that enhances both its appearance and durability.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.  
Wattage: 20W  
Efficacy: 110lm/W  
High efficiency, low flicker driver  
3 STEP Mac Adam  
Lamp Type: COB  
Light source: Citizen / CREE  
Operating Temperature: -20°C to 45°C  
Glow Wire Test 850" C  
Warranty: 5 Years  
Life Time: 50,000hrs at 25°C  
(L80/B10).

### Fields of Application:

Retail  
Galleries hotels  
Living spaces  
Conference rooms  
Counters  
Restaurants

### Installation Method:

Recessed.

Wattage(W)	:	20				
Finish	:	White (W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5700K	6500K
Beam Angle	:	24°	36°	55°		
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Casambi


\*Special Color and Finish on request

### Product Code (96810420):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out  (mm)
20	2200LM	104x79	95

\*Luminous flux value is calculated for 4000K CRI>80, 3 STEP Mac Adam

### Photometric:

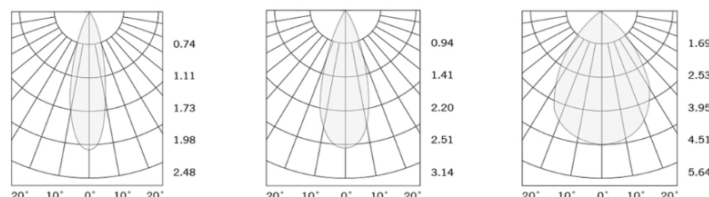

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96810420 27K 24D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	24D - 24°	8->80	1 - ON/OFF	W-White
30K - 3000K	36D - 36°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	55D - 55°		3 - DALI	
57K - 5700K			4 - Phase Dimming	
65K - 6500K			5 - Casambi	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C