



BRUNO



Features:

BRUNO is a Trimless Downlight has a sleek and versatile recessed lighting. Crafted from durable die cast Aluminum this fixture ensures longevity, superior heat dissipation,

Its sleek design is engineered for precision and adaptability, featuring a 50° and 355° rotation, allowing for precise light direction.

Available in six sophisticated body colors—Black, White, Matt Silver, Matt Brass, Nickel, and Chrome.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 12W

High Lumen: 90lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10).

Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants

Installation Method:

Recessed Adjustable

| | | | | | | | |
|------------|---|----------|----------|-----------|---------------|-----------|-----------|
| Wattage | : | 12 | | | | | |
| Finish | : | White(W) | Black(B) | Silver(S) | Brass(B) | Nickel(N) | Chrome(C) |
| Kelvin* | : | 2700K | 3000K | 3500K | 4000K | 5000K | |
| Beam Angle | : | 18° | 24° | 36° | 60° | | |
| CRI | : | 90+ | | | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming | Bluetooth | |


*Special Color & Finish on request

Product Code (96813712.40):

| Wattage | Lumens(lm) | Dimension(LxWxH)m | Cut Out (mm) |
|---------|------------|-------------------|--------------|
| 12 | 1080LM | 137x79x58 | 85x80 |

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

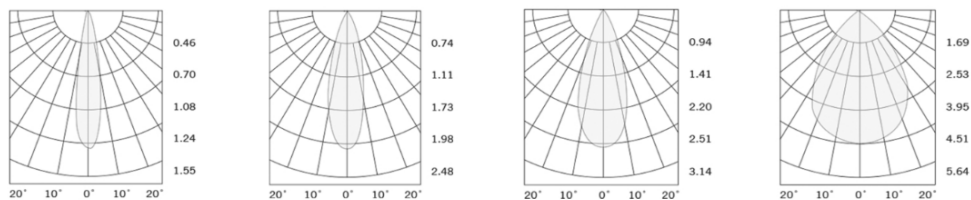

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96813712.40 27K 18D 9 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|------------|-------|-------------------|----------|
| 27K - 2700K | 18D - 18° | 9->90 | 1 - ON/OFF | W-White |
| 30K - 3000K | 24D - 24° | | 2 - 0/1-10V | B-Black |
| 35K - 3500K | 36D - 36° | | 3 - DALI | S-Silver |
| 40K - 4000K | 60D - 60° | | 4 - Phase Dimming | B-Brass |
| 50K - 5000K | | | 5 - Bluetooth | N-Nickel |
| | | | | C-Chrome |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C