


## BUTTON



### Description:

BUTTON is a high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and PC optical concept.

Sophisticated surface finish gives a high end appearance of texture. Its exquisite surface treatment provides good weather resistance with an IP65 protection grade.

It has three key advantages: anti-glare lighting, wide irradiation range, and excellent illumination uniformity.

Main uses architectural addition to important business and commercial buildings, corporate headquarters, parks, recreational areas and gardens.

Available Height Options: 350mm and 750mm

### Product Specifications:

Housing : Die cast Aluminium  
 Diffuser : Polycarbonate  
 Coating: Powder Coating  
 Net Weight : 3KG  
 Gasket: Moulding shaped silicone seal  
 Power Cable: 0.5 mtr. power cable included  
 Driver : High efficiency, low flicker driver  
 Installation Type: Surface Mounted  
 Adjustable: No  
 Warranty: 5 Years

### Technical Specifications:

Wattage: 6.5 - 12W  
 Voltage: 200-240V AC  
 Frequency: 50-60Hz  
 Light Source: Bridgelux / OSRAM  
 Lumen: 85lm/W  
 Mac Adam: 4 Step  
 Safety Class: I  
 Working Temperature:-20°C to 55°C  
 Life Time: 50,000hrs (L80/B10) at 35°C

### Parameter:

Wattage(W)	:	6.5W / 12W
Finish	:	Black (B) / White (W) / Silver (S) / Grey (G)
Kelvin*	:	2700K/ 3000K / 4000K
Beam Angle	:	115°
CRI	:	80
Control Mode	:	ON/OFF / DALI

### Order Code:

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
547181	6.5-6.5W	27-2700K	A-200-240VAC	115-115°	B-Black	1-ON/OFF
	12-12W	30-3000K			W-White	2-DALI
		40-4000K			S-Silver	
					G-Grey	

**Ex: Order Code:** 5471816.527A115B1

### Standards :

EN 60598-1


EN 60598-2-2

EN 60598-3-2

EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Photometric:

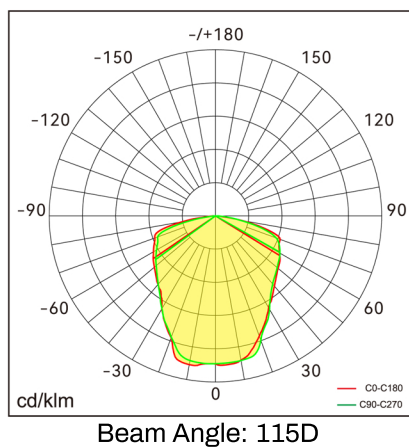


## Accessories:



J Anchor Bolt Kit  
Φ120x200mm



Expansion screw  
M6-Φ8x80mm

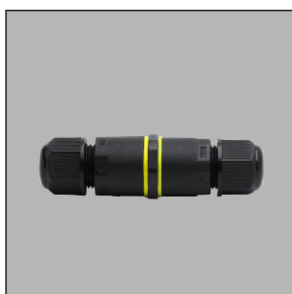

M682-B(3P)  
IP68 Waterproof connector  
72x21mm



M684-B(5P)  
IP68 Waterproof connector  
99x25mm



M685-Y  
IP68 Waterproof connector  
140x72mm

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C