


CAPE



Features:

CAPE is a waterproof recessed LED Light, Die-cast aluminum housing, good thermal dissipation assured lifetime.

High precision processing, ensure sealing safety.

High efficiency optic reflector, surface finish coating against high corrosion resistance test and salt spray test, IP65 waterproof and dustproof.

Spring mounting clamp for easy installation.

High light Transmissivity.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 15 W

High Lumen: 120lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850°C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C

(L80/B10).

Fields of Application:

Retail

Galleries hotels

Living spaces

Conference rooms

Counters

Restaurants

Installation Method:

Recessed

Wattage(W)	:	15				
Finish	:	White(W)	Black(B)	Grey(G)		
Kelvin*	:	2700K	3000K	4000K	5000K	
Beam Angle	:	15°	24°	38°	45°	60°
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	


*Special Color & Finish on request

Product Code (96809015):

Wattage	Lumens(lm)	Dimension(ØxH) mm	Cut out  mm
15	1800LM	90x52	75

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

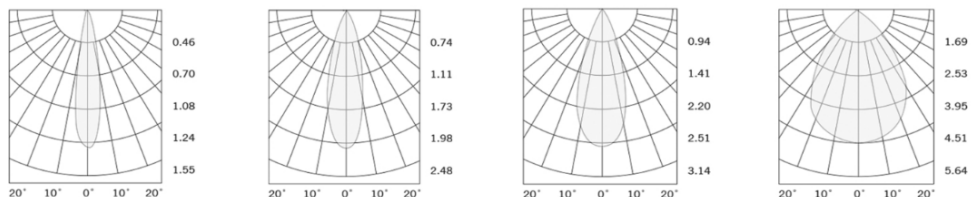

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96809015 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	38D - 38°		3 - DALI	G-Grey
50K - 5000K	45D - 45°		4 - Phase Dimming	
	60D - 60°			

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C