



## CLONE



### Features:

CLONE is the lamp body adopts high-pressure Die-cast aluminum body, with high reflectance Aluminum reflector for extend long service lifetime.

The head can be pulled down vertically 45°, 355° rotation to meet any corner lighting, black front ring anti-glare performance is good.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 20 - 25 W

High Lumen: 120lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10)

### Fields of Application:

Retail  
Education  
Galleries hotels  
Living spaces  
Conference rooms  
Counters  
Restaurants


### Installation Method:

Recessed Adjustable.

Wattage(W)	:	20	25		
Finish	:	White(W)	Black(B)		
Kelvin*	:	3000K	4000K	5000K	
Beam Angle	:	15°	24°	36°	60°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


\*Special Color & Finish on request

### Product Code (96813025.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
20	2400LM	130x130x90	120x120
25	3000LM	130x130x90	120x120

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

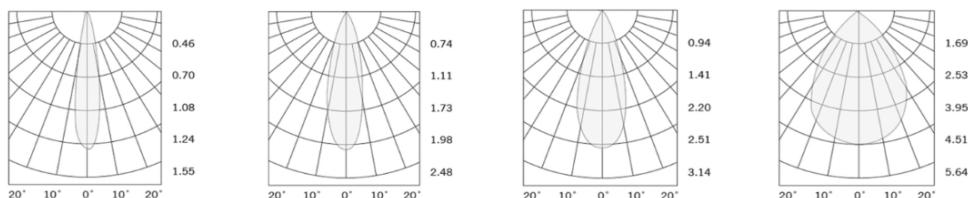

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96813025.60 30K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	15D - 15°	8->80	1 - ON/OFF	W-White
40K - 4000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
50K - 5000K	36D - 36°		3 - DALI	
	60D - 60°		4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C