



CLONE



Features:

CLONE is the lamp body adopts high-pressure Die-cast aluminum body, with high reflectance Aluminum reflector for extend long service lifetime.

The head can be pulled down vertically 45°, 355° rotation to meet any corner lighting, black front ring anti-glare performance is good.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 2x20 - 2x25W

High Lumen: 120lm/W

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850 °C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C

(L80/B10).

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Conference rooms

Counters

Restaurants

Installation Method:

Recessed Adjustable.

Wattage(W)	:	2x20	2x25		
Finish	:	White(W)	Black(B)		
Kelvin*	:	3000K	4000K	5000K	
Beam Angle	:	15°	24°	36°	60°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96826050.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
2x20	4800LM	260x130x90	250x120
2x25	6000LM	260x130x90	250x120

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

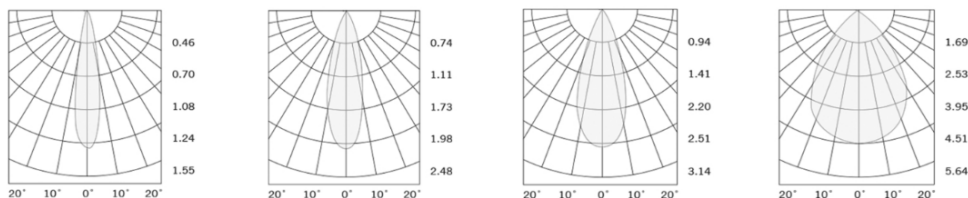

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96826050.60~~ 30K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	15D - 15°	8->80	1 - ON/OFF	W-White
40K - 4000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
50K - 5000K	36D - 36°		3 - DALI	
	60D - 60°		4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C