




CLONE



Features:

CLONE is the lamp body adopts high-pressure Die-cast aluminum body, with high reflectance Aluminum reflector for extend long service lifetime.

The head can be pulled down vertically 45°, 355° rotation to meet any corner lighting, black front ring anti-glare performance is good.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 2X35 - 40 W

High Lumen: 120lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Conference rooms

Counters

Restaurants

Installation Method:

Recessed Adjustable.

Wattage(W)	:	2x35	2x40			
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	4000K	5000K		
Beam Angle	:	15°	24°	36°	60°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96831080.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out ⌀ (mm)
2x35	8400LM	310x155x120	295x140
2x40	9600LM	310x155x120	295x140

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

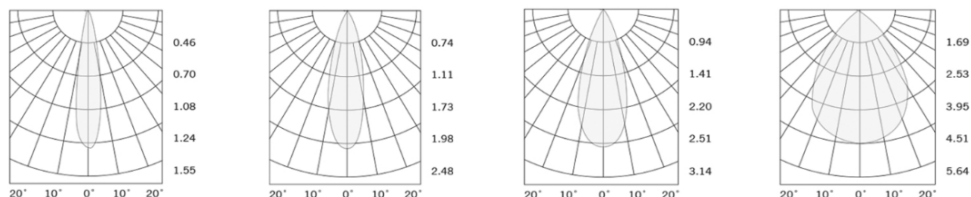

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96831080.60 30K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	15D - 15°	8->80	1 - ON/OFF	W-White
40K - 4000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
50K - 5000K	36D - 36°		3 - DALI	
	60D - 60°		4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C