

DROPS



Features:

Drops is elegant decorative pendant light combines contemporary design with premium materials to create a refined lighting solution for modern interiors.

Its body is crafted from high-quality glass with a sophisticated graphite finish, adding a sleek and stylish touch to any space.

The light features a durable polycarbonate reflector paired with a clear glass diffuser, ensuring bright yet soft illumination with UGR <16.5, delivering excellent visual comfort.

Engineered with a passive heat sink for efficient thermal management, it guarantees long-lasting performance and reliability.

Perfect for residential and commercial settings, this pendant light enhances ambience while serving as a striking design element.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 3W

High Lumen: 100lm/w

3 STEP Mac Adam

Driver Brand: Vossloh Schwabe (VS)

High efficiency, low flicker driver

Lamp Type: COB

Lamp Brand: OSRAM LED

Operating Temperature: -20°C to 40°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail

Education

Galleries hotels

Conference rooms

Counters

Restaurants

Installation Method:

Suspended.

Wattage(W)	:	3				
Finish	:	White(W)	Black(B)	Silver (S)		
Kelvin*	:	2700K	3500K	3000K	4000K	5700K
Beam Angle	:	120°				
CRI	:	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96809003):

Wattage	Lumens(lm)	Dimension(ØxH) mm
3	300LM	90x390

*Luminous flux value is calculated for 4000K CRI>90

Photometric:

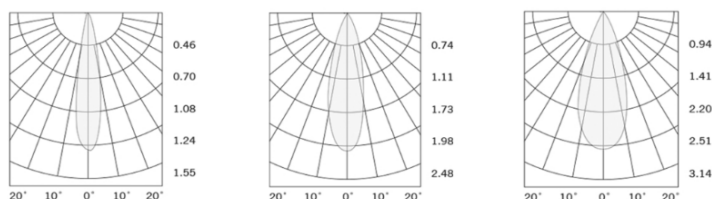

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: <u>96809003</u> <u>27K</u> <u>120D</u> <u>9</u> <u>1</u> <u>W</u>				
CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	120D - 120°	9->90	1 - ON/OFF	W-White
35K - 3500K			2 - 0/1-10V	B-Black
30K - 3000K			3 - DALI	S-Silver
40K - 4000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C