


DRUM



Features:

DRUM is an exterior waterproof surface-mounted cylinder downlight. There is a special waterproof rubber ring on the glass cover of the cylinder downlight fixture, and the input line on the back with waterproof connector. Die Cast Aluminum body with solvent free power coated with Lens, high-temperature resistance, no deformation, uniform luminescence. High thermal conductivity double-sided aluminum substrate.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 10 - 15 W
 High Lumen: 120lm/w
 3 STEP Mac Adam
 Driver: Inbuilt, High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 50°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at 35°C (L70/B10).

Fields of Application:

Retail
 Galleries hotels
 Outdoor spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Surface / Suspended.

| | | | | | |
|------------|---|----------|----------|---------|---------------|
| Wattage(W) | : | 10 | 15 | | |
| Finish | : | White(W) | Black(B) | Grey(G) | |
| Kelvin* | : | 2700K | 3000K | 4000K | 5000K 5700K |
| Beam Angle | : | 30° | 45° | 60° | |
| CRI | : | 80+ | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming |


*Special Color & Finish on request

Product Code (96807515):

| Wattage | Lumens(lm) | Dimension(Ø x H) mm |
|---------|------------|---------------------|
| 10 | 1000LM | 75x75 |
| 15 | 1500LM | 75x75 |

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

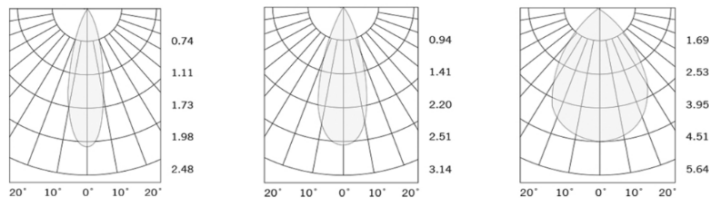

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96807515 27K 30D 8 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|------------|-------|-------------------|---------|
| 27K - 2700K | 30D - 30° | 8->80 | 1 - ON/OFF | W-White |
| 30K - 3000K | 45D - 45° | | 2 - 0/1-10V | B-Black |
| 40K - 4000K | 60D - 60° | | 3 - DALI | G-Grey |
| 50K - 5000K | | | 4 - Phase Dimming | |
| 57K - 5700K | | | | |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C