



DZOR



Accessories

-  Glass Diffuser
-  Honeycomb Louvre



Features:

DZOR Adjustable slim, Sleek, modern appearance design track light for installation on a mains 48 voltage track.

High quality die cast aluminum body with Anti Yellowing PMMA LENS.

Universal line voltage led track lighting heads, fit in 3 phase 4 wires, and 5 phase 6 wire track systems.

Adjustable Angle with 35 degrees horizontal rotation.

This light offers Ultra Low UGR<14, excellent for visual comfort.

Available with accessories to lens Glass Diffuser, Honeycomb Louvre, reduce glare significantly by controlling the light angle.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 10-14W

High Lumen: 100lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L90/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

On an electrified track or special base 48V DC.

Wattage(W)	:	10	14				
Finish	:	Customized (C)	Liquid Paint	Anodize			
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
Beam Angle	:	18°	24°	36°			
CRI	:	90+	97+				
Driver	:	ON/OFF	DALI	DALI			


*Special Color and Finish on request

Product Code (66502514):

Wattage	Lumens(lm)	Dimension(ØxHxL) mm
10	1000LM	25x122x144
14	1400LM	25x122x144

*Luminous flux value is calculated for 4000K CRI>90

Photometric:

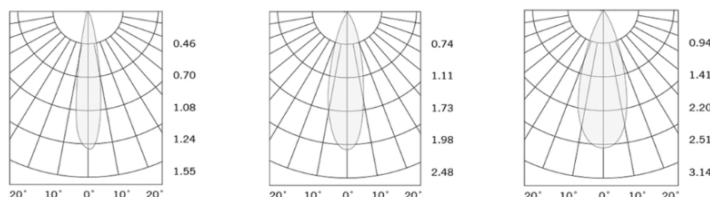

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: [66502514](#) [27K](#) [18D](#) [9](#) [1](#) [C](#)

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	18D - 18°	9->90	1 - ON/OFF	C-Customized
30K - 3000K	24D - 24°	9->97	2 - DALI	L-Liquid Paint
35K - 3500K	36D - 36°		3 - DALI	A-Anodize
40K - 4000K				
50K - 5000K				
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C