

DZOR



Features:

DZOR Surface Mounted slim, Sleek, modern appearance design.
High quality die cast aluminum body with Anti Yellowing PMMA LENS.
Adjustable Angle with 35 degrees horizontal rotation.
This light offers Ultra Low UGR<14, excellent for visual comfort.
Available with accessories to lens Glass Diffuser, Honeycomb Louvre, reduce glare significantly by controlling the light angle.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 48 V AC, 50 Hz.
Wattage: 10-14W
High Lumen: 100lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C (L90/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces

Installation Method:

Surface Mounted.

Wattage(W)	:	10	14				
Finish	:	Customized (C)	Liquid Paint	Anodize			
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
Beam Angle	:	18°	24°	36°			
CRI	:	90+	97+				
Driver	:	ON/OFF	DALI	DALI			


*Special Color and Finish on request

Product Code (96802514):

Wattage	Lumens(lm)	Dimension(ØxHxL) mm	Cut out()mm
10	1000LM	25x122x169	90
14	1400LM	25x122x169	90

*Luminous flux value is calculated for 4000K CRI>90

Photometric:

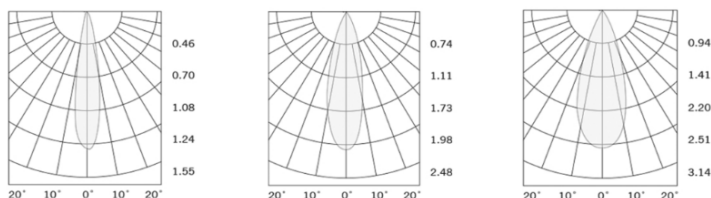

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: [96802514](#) [27K](#) [18D](#) [9](#) [1](#) [C](#)

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	18D - 18°	9->90	1 - ON/OFF	C-Customized
30K - 3000K	24D - 24°	9->97	2 - DALI	L-Liquid Paint
35K - 3500K	36D - 36°		3 - DALI	A-Anodize
40K - 4000K				
50K - 5000K				
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C