


ESSENCE

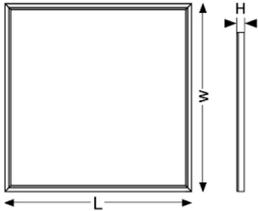

Features:

Essence 130 lm/W Slim Panel , Aluminum Body, Highly Efficient Mitsubishi Light Guard for optimum output, Non - Yellowing Opal Diffuser.

It can be mounted in ceiling recessed, surface mounted and suspended as per requirements.

Different frame designs and colors are available, Easy and various installation styles.

Dimmable compatible with Dali, Lighting sensors and Motion sensors optional Emergency battery

pack last for 3 hours.

Technical Specifications:

Input Voltage : 220- 240V AC, 50 Hz.

Wattage : 20-40W

High Efficacy : 130lm/w

LED Type : OSRAM

4 STEP Mac Adam

High efficiency, low Flicker driver

UGR >19

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty : 5 Years

Life Time : 50,000hrs at ta 25°C

(L80/B10)

Fields of Application:

Offices / Restaurants

Hotels / Shops

School/ Hospital

Hallway/ lobbies

Meeting Rooms

Installation Method:

Recessed Adjustable

Wattage(W)	:	20	25	35	40
Finish	:	White(W)	Black(B)		
Kelvin*	:	3000K	4000K	5000K	5700K 6500K
Beam Angle	:	90°	120°		
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96759540):

Wattage	Lumens(lm)	Dimension(LxWxH) mm
20	2600LM	595x595x10
25	3250LM	595x595x10
35	4700LM	595x595x10
40	5400LM	595x595x10

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

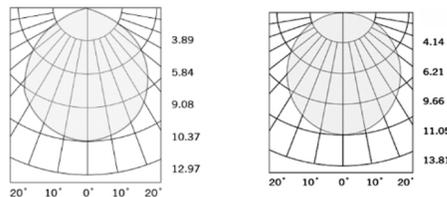

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96759540 30K 90D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	90D - 90°	8->80	1 - ON/OFF	W-White
40K - 4000K	120D - 120°	9->90	2 - 0/1-10V	B-Black
50K - 5000K			3 - DALI	
57K - 5700K			4 - Phase Dimming	
65K - 6500K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C