



## EVA PRO



### Features:

- Eva Pro Recessed Adjustable downlight with highly efficacy PC reflector and PMMA lens.
- Precision engineered adjustment mechanism, easy to adjust to specific angle.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Different colors of secondary reflector are available.
- Anti-glare accessory provides maximum eye comfort.
- 30° tilt and 355° rotation.

### Technical Specifications:

- Input Voltage: 220-240 V AC, 50 Hz.
- Wattage: 10 - 15 W
- High Lumen: 115lm/w
- 3 STEP Mac Adam
- High efficiency, low flicker driver
- Lamp Type: COB
- Operating Temperature: -20°C to 45°C
- Glow Wire Test 850°C
- Warranty: 5 Years
- Life Time: 50,000hrs at 25°C (L80/B10)

### Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants

### Installation Method:

- Recessed Adjustable

Wattage(W)	:	10	15			
Finish	:	White(W)	Black(B)	Gray(G)		
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	15°	24°	36°		
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


\*Special Color & Finish on request

### Product Code (96808515.60):

Wattage	Lumens(lm)	Dimension(LxW xH) mm	Cut out (mm)
10	1150LM	85x85x98.9	75x75
15	1725LM	85x85x108.9	75x75

\*Luminous øux value is calculated for 4000K CRI>80

### Photometric:

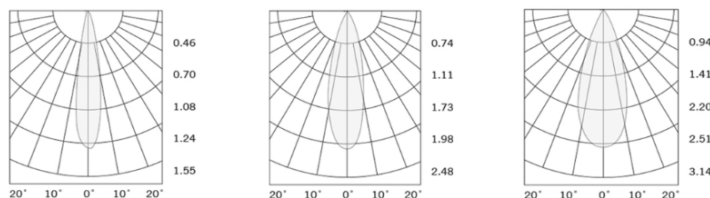

### Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96808515.60 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	G-Gray
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C