


EYE

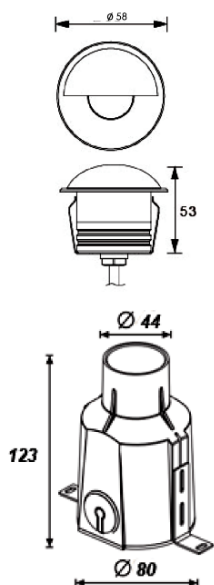

Description:

EYE round wall light, typically small circular fixture designed for outdoor or indoor use. It is installed flush with a surface, such as a stair, deck, or pathway, to provide illumination and enhance safety.

These lights often have a low profile, durable construction, and are designed to withstand various weather conditions.

They come in various designs, wattages, and light sources, providing flexibility for different lighting preferences and applications.

Round step lights are commonly used to illuminate steps, walkways, or other areas where low-level, subtle lighting is desired for both aesthetic and practical purposes.

Product Specifications:

Front cover : Die cast Aluminum grey
Housing : Die cast Aluminum grey
Glass : NA
Gasket: Molding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable: 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type: Wall Mounted
Adjustable: No

Technical Specifications:

Wattage: 2 - 3W
Voltage: 220-240VAC
Frequency: 50-60Hz
Light Source: OSRAM/EPISTAR/CREE
Lumen: 100lm/W
Mac Adam: 3 Step
Safety Class: II
Working Temperature:-20°C to 55°C
Life Time: 50,000hrs (L80/B10) at 35°C
Warranty: 5 Years

Parameter:


Wattage(W)	:	2W / 3W
Finish	:	Grey (G) / Customized (C)
Kelvin*	:	2700K/ 3000K / 4000K / 6000K
Beam Angle	:	80°
CRI	:	80
Control Mode	:	ON/OFF / DALI / 0 / 1-10V

Order Code:

Product Code	Wattage	CCT	Voltage	Beam Angle	Finish	Control Mode
540058	02-2W(1x2W)	27-2700K	A-220-240VAC	80-80°	G-Grey	1-ON/OFF
	03-3W(1x3W)	30-3000K			C-Customized	2-DALI
		40-4000K				3-0/1-10V
		60-6000K				

Ex: Order Code: 5400580227A'80G1

Photometric:



Standards :

EN 60598-1

EN 60598-2-2

EN 60598-3-2

EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C