


GALL



Features:

GALL Track light for single phase applications on mains voltage track.
High quality die cast aluminum with diffuser and Anodized Reflector.
Universal line voltage led track lighting heads, fits in 3 phase 4 wires track systems, and Single phase 2 wire systems.
Adjustable Angle with 355 degrees horizontal rotation, 90 degrees vertical adjustment.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.
Wattage: 20-30W
High Lumen: 120lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	20	25	30			
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
Beam Angle	:	15°	24°	45°	60°		
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color and Finish on request

Product Code (96507330):

Wattage	Lumens(lm)	Dimension(Ø x L) mm
20	2400LM	73x130
25	3000LM	73x130
30	3600LM	73x130

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

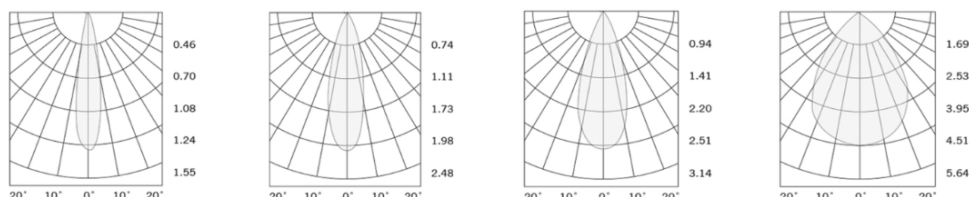

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96507330 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
35K - 3500K	45D - 45°		3 - DALI	
40K - 4000K	60D - 60°		4 - Phase Dimming	
50K - 5000K			5 - Bluetooth	
57K - 5700K				