


## GALL



### Features:

GALL Track light for single phase applications on mains voltage track.  
 High quality die cast aluminum with diffuser and Anodized Reflector.  
 Universal line voltage led track lighting heads, fits in 3 phase 4 wires track systems, and Single phase 2 wire systems.  
 Adjustable Angle with 355 degrees horizontal rotation, 90 degrees vertical adjustment.  
 Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.  
 Wattage: 35-40W  
 High Lumen: 120lm/w  
 3 STEP Mac Adam  
 High efficiency, low flicker driver  
 Lamp Type: COB  
 Operating Temperature: -20°C to 45°C  
 Glow Wire Test 850° C  
 Warranty: 5 Years  
 Life Time: 50,000hrs at 25°C (L80/B10)

### Fields of Application:

Retail  
 Education  
 Galleries hotels  
 Living spaces

### Installation Method:

On an electrified track or special base.

Wattage(W)	:	35	40				
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
Beam Angle	:	15°	24°	45°	60°		
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


\*Special Color and Finish on request

### Product Code (96509540):

Wattage	Lumens(lm)	Dimension(Ø x L) mm
35	4200LM	95x151
40	4800LM	95x151

\*Luminous øux value is calculated for 4000K CRI>80

### Photometric:

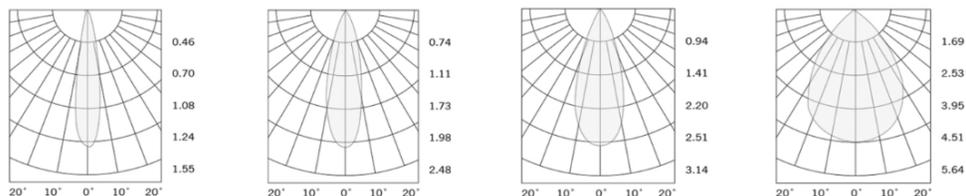

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96509540 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
35K - 3500K	45D - 45°		3 - DALI	
40K - 4000K	60D - 60°		4 - Phase Dimming	
50K - 5000K			5 - Bluetooth	
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C