



GALSA



Features:

- GALSA is recessed downlight in line with contemporary aesthetic concept.
- Aluminum Die-cast body, stable heat dissipation and more durable.
- Solvent Free Power Coating with RAL 9003, RAL 9004, RAL 9006.
- High reflectance reflector for optimal light output.
- Easy to adjust to specific angle.
- The spot transition uniform and full without residual light.
- High light Transmissivity.
- Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

- Input Voltage: 220-240 V AC, 50 Hz.
- Wattage: 2x35 W
- High Lumen: 130lm/w
- 3 STEP Mac Adam
- High efficiency, low flicker driver
- Lamp Type: COB
- Operating Temperature: -20°C to 45°C
- Glow Wire Test 850° C
- Warranty: 5 Years
- Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants


Installation Method:

- Recessed Adjustable

Wattage(W)	:	2x35			
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	2700K	3000K	4000K	5700K
Beam Angle	:	15°	24°	36°	60°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (97826070.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
2x35	9100LM	260x130x105	250x120

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

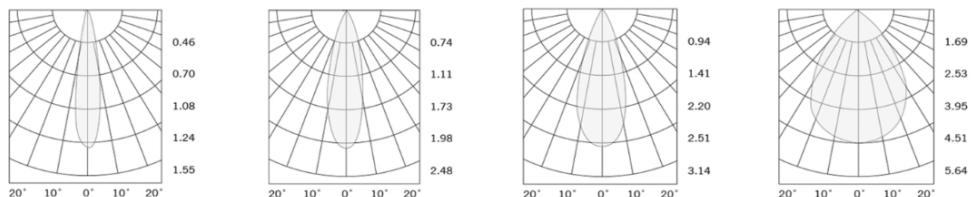

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 97826070.60 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	G-Gray
57K - 5700K	60D - 60°		4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C