



GALSA



Features:

GALSA is recessed downlight, in line with contemporary aesthetic concept.
Aluminum Die-cast body, stable heat dissipation and more durable.
Solvent Free Power Coating with RAL 9003, RAL 9004, RAL 9006.
High reflectance reflector for optimal light output.
Easy to adjust to specific angle.
The spot transition uniform and full without residual light.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 2X42 W
High Lumen: 130lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants


Installation Method:

Recessed Adjustable

Wattage(W)	:	2x42				
Finish	:	White(W)	Black(B)	Gray(G)		
Kelvin*	:	2700K	3000K	4000K	5700K	
Beam Angle	:	15°	24°	36°	60°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (97831084.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
2x42	10920LM	310x155x141	295x140

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

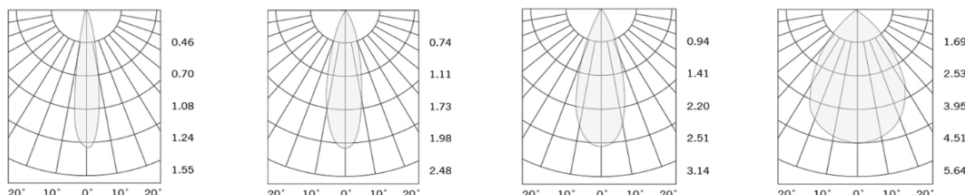

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 97831084.60 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	G-Gray
57K - 5700K	60D - 60°		4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C