



GRINA

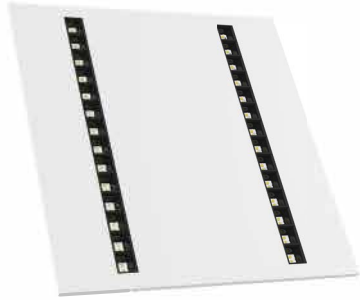

Features:

GRINA panel light provides flexibility for beam coverages, high efficiency. It constructed using aluminium body and High reflectivity mirror aluminium reflector. It can be mounted in ceiling recessed, surface mounted and suspended as per requirement. Uniform light distribution, Optimum glare control, Passive cooling, Homogeneous light output in low depth of housing, No infrared rays, No ultraviolet radiation. Lighting sensors and Motion sensors are optional.

Technical Specifications:

Input Voltage : 220- 240V AC, 50 Hz.
Wattage : 26W
High Efficacy : 140lm/w
3 STEP Mac Adam
High efficiency, low Flicker driver
UGR >19
Operating Temperature: -20°C to 50°C
Glow Wire Test 850° C
Warranty : 5 Years
Life Time : 50,000hrs at ta 25°C (L80/B10)

Fields of Application :

School
Offices
lobbies
Hallway
Hospital
Restaurants
Meeting Rooms

Installation Method :

Recessed Mounted / Box Surface Mounted
Suspension Mounted

Wattage(W)	: 26			
Finish	: White(W)	Black(B)	Silver(S)	
Kelvin*	: 3000K	4000K	5000K	5700K
Beam Angle	: 30°	50°	70°	
CRI	: 80+			
Driver	: ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96662026):

Wattage	Lumens(lm)	Dimension(LxWx H) mm	Type
26	3,640LM	595x595x21.5	A
26	3,640LM	620x620x21.5	B

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

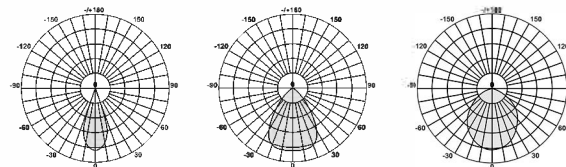


Standards

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 60598-3-2



Order Code Ex : 96662026 30K 30D 8 1 W A					
CCT	Beam Angle	CRI	Driver	Finish	Type
30K-3000K 40K-4000K 50K-5000K 57K-5700K	30D-30° 50D-50° 70D-70°	8->80	1-ON/OFF 2-0/1-10 3-DALI 4-Phase Dimming 5-Bluetooth	White(W) Black(B) Silver(S)	A B

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C




LED PANEL LIGHT INSTALLATION

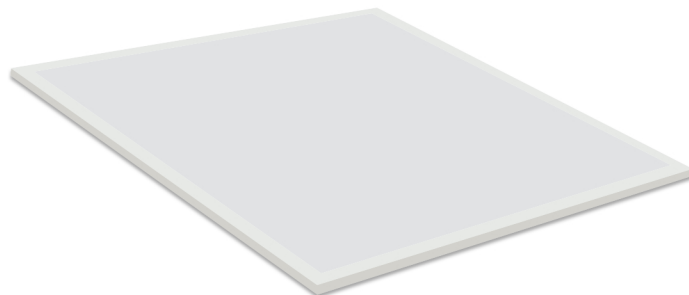

ACCESSORIES LIST



Recessed



X2

X2



X6





X6



X4

Box Surface Mounted

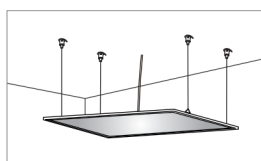

X4



X4



X4



X4



X4

Pendant Mounted