



HALVES

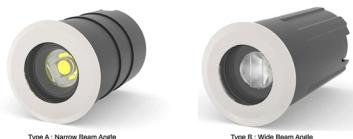

Type A : Narrow Beam Angle


Type B : Wide Beam Angle

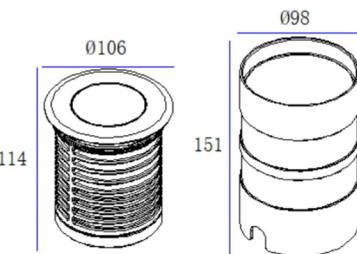

Type C : Glare Shield

Type D : Honey Comb

Photometric:

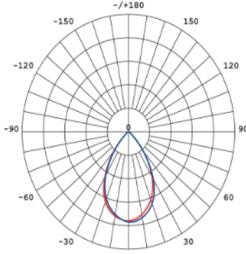

Standard:

EN 60598-1

EN 60598-2-2

EN 60598-3-2

EN 60598-3-3

Order Code:

Product	Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
544106		14 - 14.3W	27-2700K	A - 220 - 240VAC	15-15°	SS - Stainless Steel	1-ON/OFF
			30-3000K		24-24°		2-0/1-10V
			40-4000K		36-36°		3-DALI
			60-6000K		50-50°		

Ex: Order Code: 5441061427A15SS1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C