


HAWK



Features:

HAWK is recessed spotlight, die cast aluminum body with PMMA lens, face frame and electrostatic spraying process.
Excellent heat dissipation, long product life and effectively reduce light ageing.
The center spot has a smooth transition to provide a soft light.
Effectively improves the luminous efficiency of lamps and lanterns, the output is more perfect.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.
Wattage: 2 - 4 W
High Lumen: 80lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: OSRAM SMD
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants


Installation Method:

Recessed.

Wattage(W)	:	2	3	4	
Finish	:	White(W)	Black(B)		
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	12°	15°	24°	
CRI	:	90+	95+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96704004):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out  (mm)
2	160LM	40x49	35
3	240LM	40x49	35
4	320LM	40x49	35

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

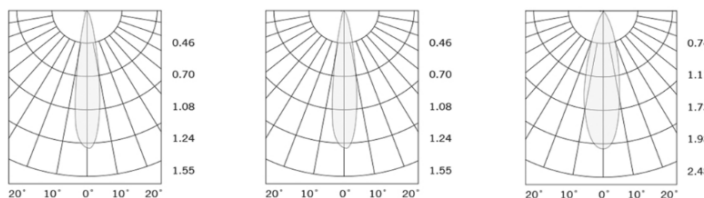

Standards

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 60598-3-2
EN 60598-3-3

Order Code Ex: 96704004 27K 12D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	12D - 12°	9->90	1 - ON/OFF	W-White
30K - 3000K	15D - 15°	9->95	2 - 0/1-10V	B-Black
40K - 4000K	24D - 24°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C