


HOLM



Features:

HOLM Is Recessed linear downlight with a die-cast aluminum body and lens combines durability and performance, making it an excellent choice for both residential and commercial applications. The die-cast aluminum construction ensures a robust and lightweight fixture that resists corrosion and heat, providing longevity and reliability.

The integrated lens optimizes light distribution, offering various beam angles to reduce glare and create a soft, even illumination.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 9W

High Lumen: 90lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

Recessed

| | | | | | | |
|------------|---|----------|----------|-------|---------------|-----------|
| Wattage(W) | : | 9 | | | | |
| Finish | : | White(W) | Black(B) | | | |
| Kelvin* | : | 2700K | 3000K | 4000K | 5000K | |
| Beam Angle | : | 15° | 24° | 38° | | |
| CRI | : | 90+ | | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming | Bluetooth |


*Special Color and Finish on request

Product Code (96813209):

| Wattage | Lumens(lm) | Dimension(LxWxH) mm | Cut Out  (mm) |
|---------|------------|------------------------|--|
| 9 | 810LM | 132x52x48 | 125x45 |

*Luminous lux value is calculated for 4000K CRI>80

Photometric:

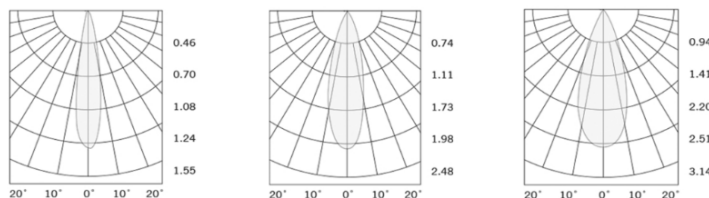

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96813209 27K 15D 9 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|------------|-------|-------------------|---------|
| 27K - 2700K | 15D - 15° | 9->90 | 1 - ON/OFF | W-White |
| 30K - 3000K | 24D - 24° | | 2 - 0/1-10V | B-Black |
| 40K - 4000K | 38D - 38° | | 3 - DALI | |
| 50K - 5000K | | | 4 - Phase Dimming | |
| | | | 5 - Bluetooth | |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C