


## HOLM



### Features:

HOLM is Adjustable linear downlight with a die-cast aluminum body and lens combines durability and performance, making it an excellent choice for both residential and commercial applications. The die-cast aluminum construction ensures a robust and lightweight fixture that resists corrosion and heat, providing longevity and reliability.

The integrated lens optimizes light distribution, offering various beam angles to reduce glare and create a soft, even illumination.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.  
 Wattage: 15W  
 High Lumen: 90lm/w  
 3 STEP Mac Adam  
 High efficiency, low flicker driver  
 Lamp Type: COB  
 Operating Temperature: -20°C to 45°C  
 Glow Wire Test 850° C  
 Warranty: 5 Years  
 Life Time: 50,000hrs at ta 25°C  
 (L80/B10)

### Fields of Application:

Retail  
 Education  
 Galleries hotels  
 Living spaces

### Installation Method:

Recessed Adjustable

Wattage(W)	:	15			
Finish	:	White(W)	Black(B)		
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	15°	24°	38°	
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


\*Special Color and Finish on request

### Product Code (96824615.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut Out (mm)
15	1350LM	246x52x58	240x45

\*Luminous lux value is calculated for 4000K CRI>80

### Photometric:

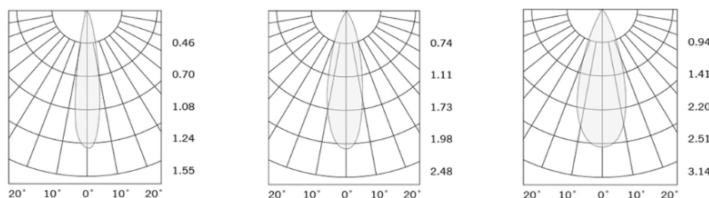

### Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96824615.60 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	38D - 38°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C