


KENT

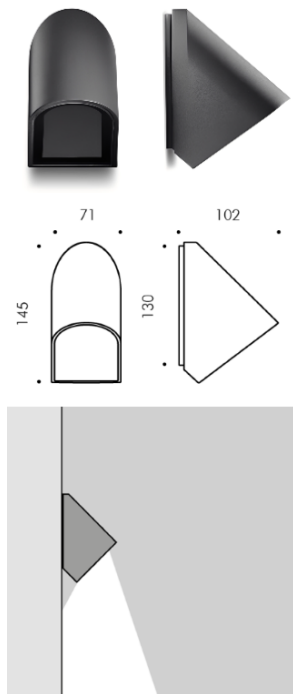

Description:

KENT is a wall luminaire to be placed at the top of the wall characterized by a light beam that draws a sharp and expressive cone on the vertical surface. The visual comfort is guaranteed by the rear position of the LED which remains totally hidden from view.

It can be used with the beam facing down or facing up, to enhance the architectural details of a ceiling or vault.

Its compact and elegant shape makes it also suitable for indoor use, especially in spa and wet environments.

Product Specifications:

Housing : Aluminium die cast housing in EN AB-47100 (low copper content with high resistance against corrosion).

Glass : Tempered Glass

Diffuser : Toughened Glass

Gasket: Moulding shaped silicone seal

Lens/Reflector : Optical lens (efficiency>90%)

Power Cable: 0.5 mt. power cable included

Driver : High efficiency, low flicker driver

Installation Type: Surface mounted

Adjustable: No

Technical Specifications:

Wattage: 15W

Voltage: 220-240VAC

Frequency: 50-60Hz

Light Source: OSRAM/EPISTAR/CREE

Lumen: 39lm/W

Mac Adam: 3 Step

UGR <19

Safety Class: II

Working Temperature: -20°C to 50°C

Life Time: 50,000hrs (L80/B50) at 25°C

Warranty: 5 Years

Parameter:


Wattage(W)	:	15W
Finish	:	Black (B) / Grey (G) / White (W) / Customized (C)
Kelvin*	:	2700K / 3000K / 4000K / 6000K
Beam Angle	:	120°
CRI	:	90+
Control Mode	:	ON/OFF / DALI / 0 / 1-10V

Order Code:

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
540230	15-15W	27-2700K	A-220-240VAC	120-120°	B-Black	1-ON/OFF
		30-3000K			G-Grey	2-DALI
		40-4000K			W-White	3-0/1-10V
		60-6000K			C-Customized	

Ex: Order Code: 5402301527A120B1

Photometric:



Standards :

EN 60598-1
EN 60598-2-2
EN 60598-3-2
EN 60598-3-3