


KIGA



Barn door Honey comb

Anti-glare ring

Features:

KIGA Track Light, Simple and modern designed, housing Die Cast Aluminum, with PMMA Optics .

The Product with Standard Finish available RAL 9005 and RAL 9011, 9003, other RAL on request.

Universal line voltage led track lighting heads, it in 3 phase 4 wires track systems, and 5 phase 6 wires DALI track system.

The product accessories optional Barn door, Honeycomb, Anti-Glare ring.

The accessories are featured to reduces the sharp, direct light and softens the appearance of the light.

Flexible adjustable beam angles, with high efficiency heat dissipation.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 23-28W

High Lumen: 120lm/w

3 STEP Mac Adam

High efficiency, low Flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10).

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	23	28		
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	15°	24°	36°	50°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Casambi


*Special Color and Finish on request

Product Code (96508528):

Wattage	Lumens(lm)	Dimension(Ø x L) mm
23	2760LM	85x104
28	3360LM	85x104

*Luminous Lux value is calculated for 4000K and CRI>80

Photometric:

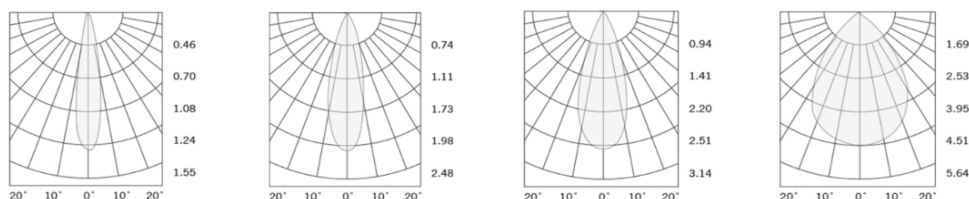

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96508528~~ 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	G-Gray
50K - 5000K	50D - 50°		4 - Phase Dimming	
			5 - Casambi	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C