


KIRA II



Features:

KIRA II Recessed Spotlight modern designed, die cast aluminum body with solvent free power coated anodized, with High Efficiency Alanod Reflector and PMMA Lens.
Aluminum Body helps in dissipating heat effectively, reducing the risk of overheating and extending the lifespan of the light with PMMA lens, With different finish reflector RAL 9003 / RAL 9006 / RAL 9005 and any another special finish as your request.
High thermal conductivity double-sided aluminum substrate.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 15W
High Lumen: 100lm/w
2STEP Mac / 3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed

| | | | | | | | |
|------------|---|----------|----------|---------|---------------|-----------|-------|
| Wattage(W) | : | 15 | | | | | |
| Finish | : | White(W) | Black(B) | Gray(G) | | | |
| Kelvin* | : | 2700K | 3000K | 3500K | 4000K | 5000K | 5700K |
| Beam Angle | : | 15° | 21° | 31° | | | |
| CRI | : | 80+ | 90+ | 97+ | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming | Bluetooth | |


*Special Color and Finish on request

Product Code (98708115):

| Wattage | Lumens(lm) | Dimension(ØxH) mm | Cut Out() |
|---------|------------|-------------------|--|
| 15 | 1500LM | 81x69 | 75 |

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

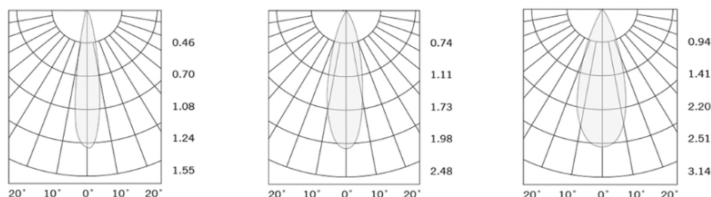

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~98708115~~ 27K 15D 8 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|------------|-------|-------------------|---------|
| 27K - 2700K | 15D - 15° | 8->80 | 1 - ON/OFF | W-White |
| 30K - 3000K | 21D - 21° | 9->90 | 2 - 0/1-10V | B-Black |
| 35K - 3500K | 31D - 31° | 9->97 | 3 - DALI | G-Gray |
| 40K - 4000K | | | 4 - Phase Dimming | |
| 50K - 5000K | | | 5 - Bluetooth | |
| 57K - 5700K | | | | |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C