

## LAMA



### Features:


LAMA is a Spike Light which is designed for durable and efficient outdoor lighting. Its die-cast aluminum housing with a polyester-sprayed surface provides shockproof and corrosion-resistant performance. The imported anti-aging rubber seal-ring ensures waterproofing and protection. A transparent tempered glass lamp enhances light transmission and durability. It also comes with adjustable bracket Base, Round Base and Stand Base. The honeycomb can make your lighting more dramatic or cinematic. Toughened glass surface, with high hardness, not easy to break. The UV-assisted and IR-free design protects illuminated objects. With gradual temperature increase, excellent heat dissipation, and waterproof sealing. This spike light offers stable and reliable performance for outdoor applications.

### Product Specifications:

Housing : Die cast aluminum  
 Front cover : Die cast aluminum  
 Coating : Powder Coating  
 Glass : Tempered Glass Cover  
 Gasket : Molding shaped silicone seal  
 Lens/Reflector : Optical lens (efficiency>90%)  
 Power Cable : 0.5 mt. power cable included  
 Driver : High efficiency, low flicker driver  
 Installation Type : Surface Mounted  
 Adjustable : Yes

### Technical Specifications:

Wattage : 2W  
 Voltage : DC24V  
 Frequency : 50-60Hz  
 Light Source : OSRAM / EPISTAR / CREE  
 Lumen : 120lm/W  
 Mac Adam : 3 Step  
 Safety Class : III  
 Working Temperature : -25°C to 50°C  
 Life Time : 50,000hrs (L80/B10) at 35°C  
 Warranty : 5 Years

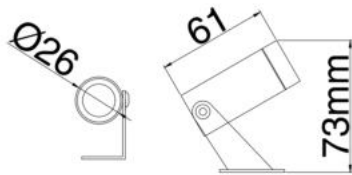

### Parameter:

Wattage(W)	:	2W
Finish	:	Matt Grey Oil Painted (G) / Matt Black (B) / Customized (C)
Kelvin*	:	2700K / 3000K / 4000K / 6000K
Beam Angle	:	30° / 45° / 60°
CRI	:	80+
Driver	:	ON/OFF / DALI / 0 / 1-10V

### Accessories:



### Order Code :

Product Code	Type	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
541026	6-Spike	2 - 2W	27-2700K	D-24VDC	30 - 30°	G-Matt Grey	1-ON/OFF
	7-Base		30-3000K		45 - 45°	B-Black	2-DALI
	8-Hood		40-4000K		60 - 60°	C-Customized	3-0/1-10V
			60-6000K				

**Ex: Order Code:** 5410266227D'30G1

### Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C