


## LANK

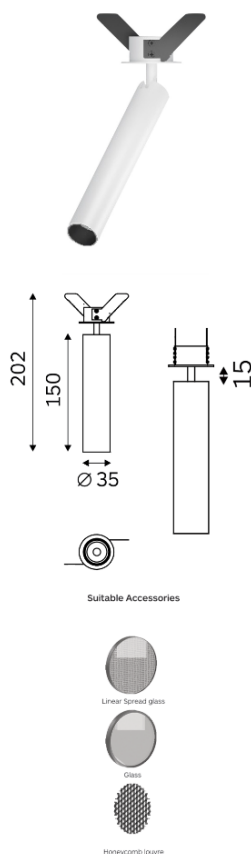

### Features:

LANK Is Recessed Adjustable Downlight into the ceiling, ensuring a sleek, clean look that doesn't interfere with the aesthetics of the space.

Unique structure and appearance of the back cover.

High quality aluminum body and PMMA Lens, offering superior heat dissipation, durability, and a lightweight structure.

This contributes to the longevity of the light source and the overall stability of the fixture.

Beam Angle available in narrow, medium, and wide beam angles to provide flexibility in light distribution depending on the project requirements.

The product also available with a range of accessories, including a honeycomb louvre for superior glare control, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity. This combination of refined design, advanced optics.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 10 -12W

High Lumen: 80lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C

(L80/B10).

### Fields of Application:

Commercial places

Galleries hotels

Car displays

Museums

Restaurants

Clothing shops

Furniture Shops

### Installation Method:

Recessed Adjustable

Wattage(W)	:	10	12		
Finish	:	White(W)	Black(B)		
Kelvin*	:	2700K	3000K	4000K	5000K 5700K
Beam Angle	:	15°	26°	35°	46° 57°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming


\*Special Color & Finish on request

### Product Code (96803512.50):

Wattage	Lumens(lm)	Dimension(Ø x H) mm
10	800LM	35x150
12	960LM	35x150

\*Luminous flux value is calculated for 4000K CRI>90

### Photometric:

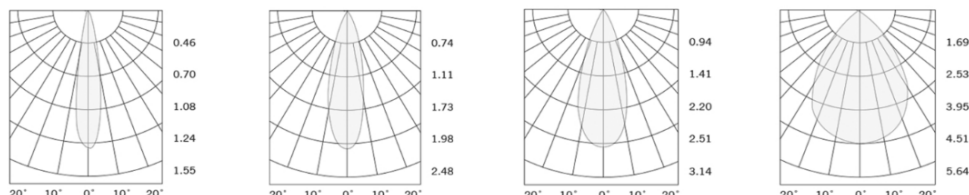

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96803512.50 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	26D - 26°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	35D - 35°		3 - DALI	
50K - 5000K	46D - 46°		4 - Phase Dimming	
57K - 5700K	57D - 57°			