


LANK

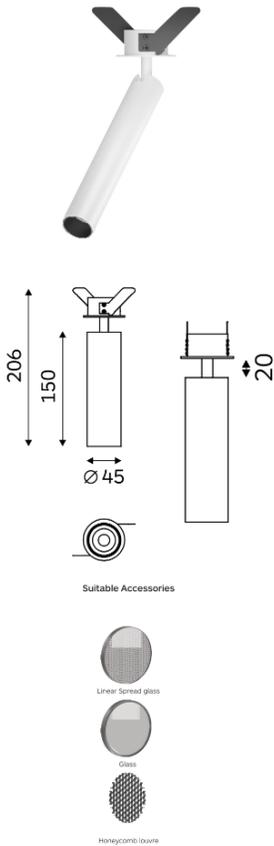

Features:

LANK Is Recessed Adjustable Downlight into the ceiling, ensuring a sleek, clean look that doesn't interfere with the aesthetics of the space.

Unique structure and appearance of the back cover.

High quality aluminum body and PMMA Lens, offering superior heat dissipation, durability, and a lightweight structure.

This contributes to the longevity of the light source and the overall stability of the fixture.

Beam Angle available in narrow, medium, and wide beam angles to provide flexibility in light distribution depending on the project requirements.

The product also available with a range of accessories, including a honeycomb louvre for superior glare control, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity. This combination of refined design, advanced optics.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 15-20W

High Lumen: 80lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C

(L80/B10).

Fields of Application:

Commercial places

Galleries hotels

Car displays

Museums

Restaurants

Clothing shops

Furniture Shops

Installation Method:

Recessed Adjustable

| | | | | | | |
|------------|---|----------|----------|-------|---------------|-------|
| Wattage(W) | : | 15 | 20 | | | |
| Finish | : | White(W) | Black(B) | | | |
| Kelvin* | : | 2700K | 3000K | 4000K | 5000K | 5700K |
| Beam Angle | : | 18° | 28° | 34° | 48° | 58° |
| CRI | : | 80+ | 90+ | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming | |


*Special Color & Finish on request

Product Code (96804520.50):

| Wattage | Lumens(lm) | Dimension(Ø x H) mm |
|---------|------------|---------------------|
| 15 | 1200LM | 45x150 |
| 20 | 1600LM | 45x150 |

*Luminous Flux value is calculated for 4000K CRI>90

Photometric:

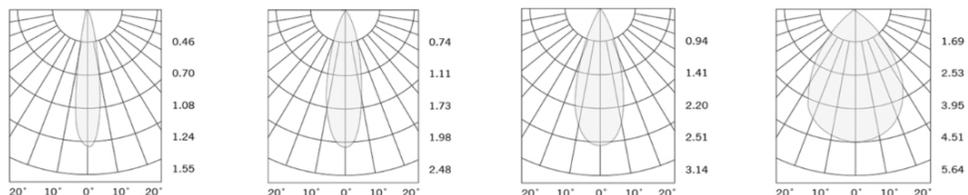

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96804520.50 27K 18D 8 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|------------|-------|-------------------|---------|
| 27K - 2700K | 18D - 18° | 8->80 | 1 - ON/OFF | W-White |
| 30K - 3000K | 28D - 28° | 9->90 | 2 - 0/1-10V | B-Black |
| 40K - 4000K | 34D - 34° | | 3 - DALI | |
| 50K - 5000K | 48D - 48° | | 4 - Phase Dimming | |
| 57K - 5700K | 58D - 58° | | | |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C