


LASHE

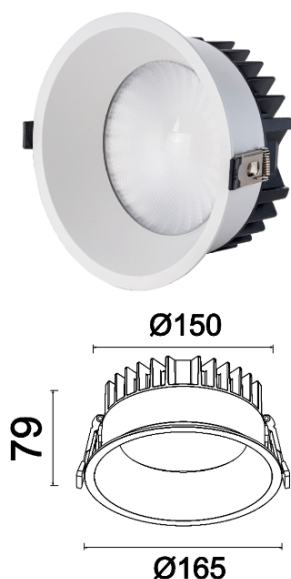

Features:

Lashe Is Recessed Downlight, provide a streamlined, modern look and reduces clutter. Aluminum Body helps in dissipating heat effectively, reducing the risk of overheating and extending the lifespan of the light, specially designed Fresnel Lens. A Fresnel lens allow the light to be focused or spread in a specific direction. It is much thinner and lighter than a traditional curved lens, can minimize glare and create more comfortable lighting. Product has Ultra compact design and ensures UGR<17. High light Transmissivity. Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 25-30W
High Lumen: 100lm/W
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: SMD Osram 2835
Operating Temperature: -25°C to +50°C
Glow Wire Test 850°C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C (L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Counters
Restaurants
Bathroom
Swimming Pools

Installation Method:

Recessed

Wattage(W)	:	25	30			
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	4000K	5000K	5700K	6000K
Beam Angle	:	80°				
CRI	:	90+	97+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color and Finish on request

Product Code (96816530):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
25	2500LM	165x79	150
30	3000LM	165x79	150

*Luminous Lux value is calculated for 4000K CRI>90

Photometric:



- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96816530~~ 30K 80D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	80D - 80°	9->90	1 - ON/OFF	W-White
40K - 4000K		9->97	2 - 0/1-10V	B-Black
50K - 5000K			3 - DALI	
57K - 5700K			4 - Phase Dimming	
60K - 6000K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C