



LIEO



Features:

LIEO is Decorative Magnetic track light are based on Track lighting fixture combines the flexibility of a magnetic track system with the design feature of lens

The product available with different options finishes, Matt Gold, Brass, Satin, White, Black.

Body made of aluminum with lens can provide enhance the aesthetic appeal of the fixture and may also provide additional functionality, such as directing light or preventing glare.

This is ideal for highlighting specific objects or areas.

The magnetic track allows you to easily move and adjust the position of the light fixture along the track.

Product has Ultra compact design and ensures UGR<19.

Technical Specifications:

Input Voltage: 48V DC, 50 Hz.

Wattage: 10W

Efficacy: 100lm/W

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Light source: Citizen / CREE

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

On an electrified Magnetic track 48V DC

Wattage(W)	:	10				
Finish	:	White(W)	Black(B)	Matt Gold	Brass	Satin
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	12°	24°	38°	45°	60°
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth
*Special Color and Finish on request						


*Special Color and Finish on request

Product Code (66508010):

Wattage	Lumens(lm)	Dimension (LxØxH)mm
10	1000LM	162x80x42

*Luminous flux value is calculated for 4000K CRI>90

Photometric:

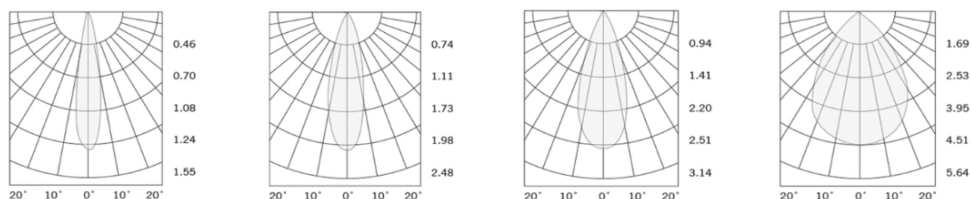

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~66508010~~ 27K 12D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K -	12D - 12°	8-	1 - ON/OFF	W-White
2700K	24D - 24°	>80	2 - 0/1-10V	B-Black
30K -	38D - 38°	9-	3 - DALI	<-B-Brass
3000K	45D - 45°	>90	4 - Phase	
40K -	60D - 60°		Dimming	
4000K			5 - Bluetooth	
50K -				
5000K				S-Satin
57K -				
5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C