


LIVA I

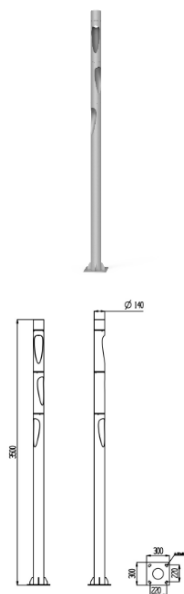

Features:

LIVA I is a modern 3-headed urban light combines functionality with architectural elegance. Each Head can be rotated at 360°, light engine adjusted to 30°, allowing flexible directional lighting tailored to specific site requirements.

The fixture is constructed from durable extruded aluminum housing, offering excellent corrosion resistance and long-lasting performance. With THD less than 10% and a power factor greater than 0.9, it ensures high electrical efficiency and superior performance.

Available with Inventronic Driver.

Available in a range of refined RAL finishes including Black (RAL 9011), Concrete Grey (RAL 7023), Metallic Grey (RAL 7011), and Grey (RAL 9023) to complement a variety of urban design aesthetics. C5 Marine Grading Available on Request.

A perfect solution for projects that demand versatility, reliability, and modern appeal in outdoor lighting.

Technical Specifications:

Input Voltage : 220- 240 V AC, 50 Hz.

Wattage : 3x15W

Optic Lens : PMMA

High Lumen : 90lm/W

3 STEP Mac Adam

Safety Class : II

High efficiency, low flicker driver

Power Factor : 96%

Coefficient $\cos\phi$: >0.9

Operating Temperature: -40°C to 60°C

Glow Wire Test 850° C

Warranty : 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B20)

Fields of Application:

Gardens

Parks

Side Walks

Pathways

Gas Station

Installation Method

Pole Mounted

Wattage(W)	:	45			
Finish	:	RAL 9011 (B)	RAL 7023 (CG)	RAL 7011 (MG)	RAL 9023 (G)
Kelvin*	:	2700K	3000K	4000K	
Beam Angle	:	30°	45°	60°	90°
CRI	:	80+			
Driver	:	ON/OFF	0/1-10V	DALI	





*Special Color & Finish on request

Product Code (863140045):

Wattage	Lumens(lm)	Dimension (øxH)mm
3x15	3x1350LM	140x3500

*Luminous flux value is calculated for 4000K CRI>80

Photometric :



Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

Order Code Ex: 863140045 27K 30D 8 1 R

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	30D - 30°	8->80	1 - ON/OFF	R-RAL 9011
30K - 3000K	45D - 45°		2 - 0/1-10V	R-RAL 7023
40K - 4000K	60D - 60°		3 - DALI	R-RAL 7011
	90D - 90°			R-RAL 9023

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C