


LUME I

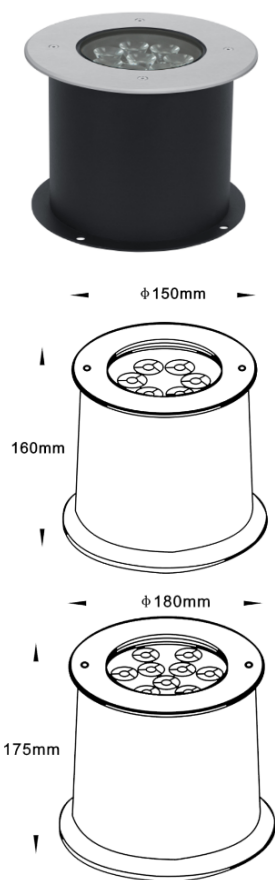

Description:

LUME I is an inground high-quality aluminum alloy die-casting lamp body, featuring a surface outdoor powder electrostatic spraying finish.

The cover, made from SUS304 or 316 stainless steel die-casting, makes it ideal for outdoor harsh environments. The entire lamp structure is waterproof with advanced technology, offering a reliable IP67 protection grade.

Engineered with a built-in anti-glare cover, this light delivers exceptional glare control with 0 glare for superior visual comfort. The ultra-clear tempered glass and imported material lens are designed to minimize light efficiency loss.

Additionally, it incorporates inductive lightning electrostatic (ESD) protection, compliant with the LEVEL 4 standard, ensuring robust protection against electrical surges.

Product Specifications:

Front cover : Stainless Steel 316
Housing : Die cast aluminum grey
Coating: Powder Coating
Glass : Tempered glass
Gasket: Molding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable: 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type: Inground

Technical Specifications:

Wattage: 12 - 20W
Voltage: DC24V / 170-265V AC
Frequency: 50-60Hz
Light Source: OSRAM/EPISTAR/CREE
Lumen: 45lm/W
Mac Adam: 3 Step
Safety Class: III
Working Temperature:-40°C to 50°C
Life Time: 50,000hrs (L80/B10) at 35°C
Warranty: 5 Years

Parameter:


Wattage(W)	:	12W / 20W
Finish	:	Grey (G) / Black (B)
Kelvin*	:	2200K/2700K/ 3000K / 4000K / 6000K
Beam Angle	:	15° / 30° / 45° / 60° / 10*60° / 20*45°
CRI	:	80
Control Mode	:	ON/OFF / DALI / 0 / 1-10V / Phase Cut

Order Code:

Product Code	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
544181	12 - 12W	22-2200K	D-24VDC	15 - 15°	G-Grey	1-ON/OFF
	20 - 20W	27-2700K		30-30°	B-Black	2-DALI
		30-3000K		45-45°		3-0/1-10V
		40-4000K		60-60°		4-Phase cut
		60-6000K		10*60-10*60°		
				20*45-20*45°		

Ex: Order Code: 5441811222D'15G1

Photometric :



Standard:

EN 60598-1
EN 60598-2-2
EN 60598-3-2
EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
544181	12 - 12W	22-2200K	A-170-265VAC	15 - 15°	G-Grey	1-ON/OFF
	20 - 20W	27-2700K		30-30°	B-Black	2-DALI
		30-3000K		45-45°		3-0/1-10V
		40-4000K		60-60°		
		60-6000K		10*60-10*60°		
				20*45-20*45°		

Ex: Order Code: 5441811222A'15G1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C