


LUMINO

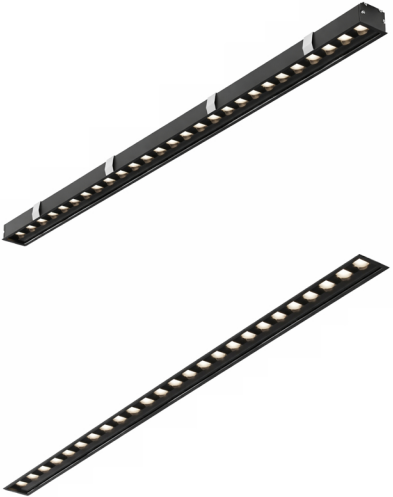

Description:

LUMINO is a linear recessed ceiling light delivers glare-free illumination using a 6063 high-density extruded aluminum alloy body combined with optical-grade PMMA optics. Its advanced baffle system ensures uniform wall-washing while providing bold vertical illumination with minimal glare, making it suitable for both indoor and outdoor architectural applications.

Designed for performance and visual comfort, it features high-efficiency optics for smooth, consistent light distribution.

Available Lengths : 614mm, 914mm and 1214mm.

The fixture supports in-ground or surface mounting options and is ideal for architectural accents, façade lighting, and feature wall illumination.

Product Specifications:

- Housing : 6063 Aluminum Alloy
- Glass : Tempered glass
- Coating : Powder Coating
- Gasket: Molding shaped silicone seal
- Lens/Reflector : Optical lens (efficiency>90%)
- Power Cable: 0.5 mt. power cable included
- Driver : High efficiency, low flicker driver
- Installation Type: Recessed
- Adjustable : No

Technical Specifications:

- Wattage: 30-60W
- Voltage: 24VDC
- Frequency: 50-60Hz
- Light Source: OSRAM / LumiLeds
- Lumen: 60lm/W
- Mac Adam: 3 Step
- Safety Class: III
- Working Temperature:-20°C to 45°C
- Life Time: 50,000hrs (L80/B10) at 25°C
- Humidity : <95%
- Warranty: 5 Years


Parameter:

Wattage(W)	:	30W / 45W / 60W
Finish	:	RAL 9001 (W) / RAL 9006 (G) / RAL 7011 (B) / RAL 9023 (DG)
Kelvin*	:	2700K/ 3000K / 3500K/ 4000K/ 5000K/ 6500K/ RGB / RGBW
Beam Angle	:	30°
CRI	:	90+
Control Mode	:	ON/OFF / DALI / 0/1-10V / DMX

Order Code:

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
539214	30 - 30W (614mm)	27 - 2700K	D-24VDC	30-30°	W - RAL 9001	1-ON/OFF
	45 - 45W (914mm)	30 - 3000K			G - RAL 9006	2- DALI
	60-60W (1214mm)	35 - 3500K			B - RAL 7011	3-0/1-10V
		40 - 4000K			DG - RAL 9023	4-DMX
		50- 5000K				
		65-6500K				
		82-RGB				
		83-RGB DMX				

Photometric :




Standards :

- EN 60598-1
- EN 60598-2-2
- EN 60598-3-2
- EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Dimensions :

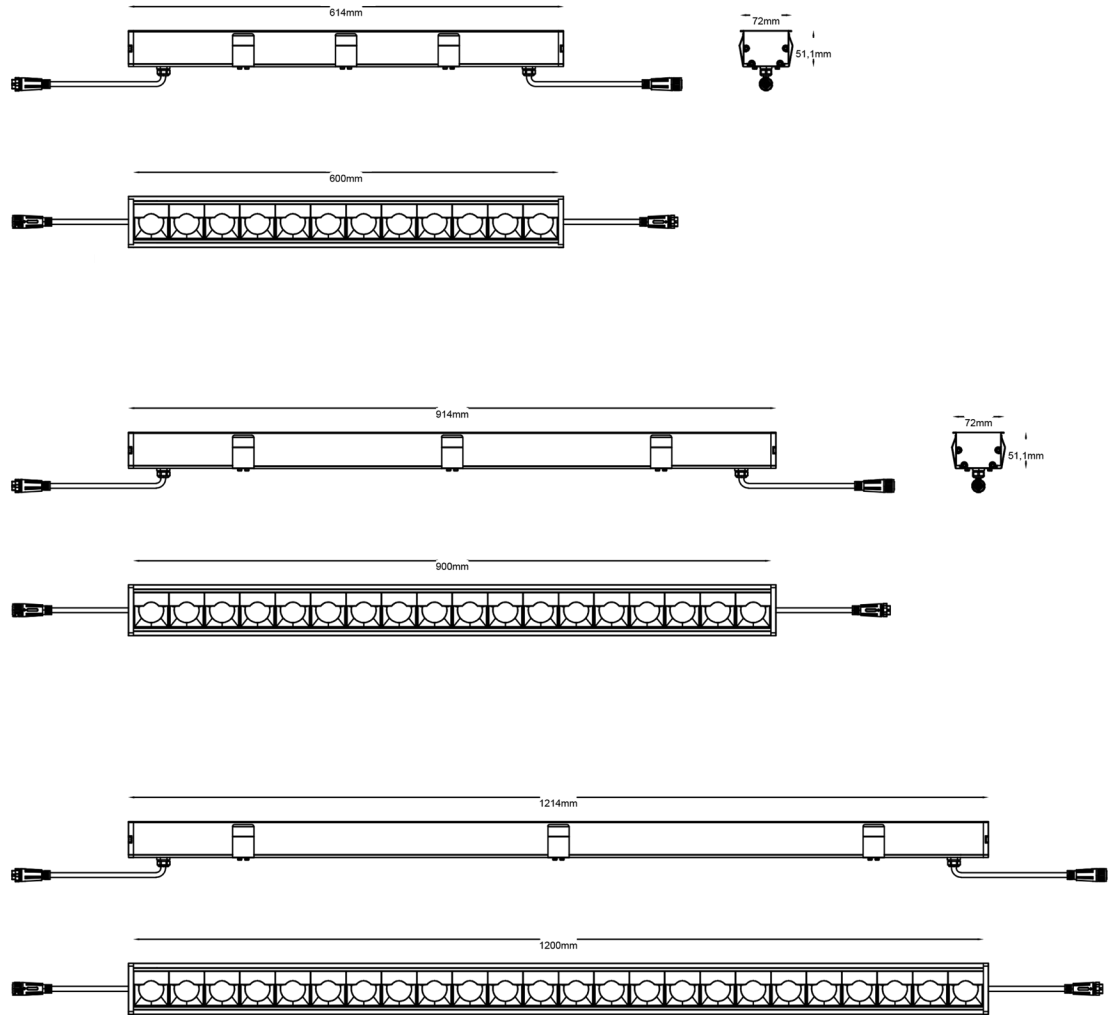

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C