


LUSN



Features:

LUSN Is Recessed Adjustable Deep anti-glare Spotlight, with highly quality of die cast aluminum body, with PMMA Lens and a lot of option of reflector.

The reflector is multi-color, White / Black / Chrome / Silver, and any finish as you requested, and can meet the needs of different occasions.

The reflector is precisely designed, plated and nano spray-painted Comfortable light with high efficiency, available with different options of beam angle 8°, 24° and 38°.

The spotlight incorporates a deep-set baffle with a smooth inner surface, minimizing glare and providing superior light control for accentuating architectural.

Product has Ultra compact design and ensures UGR<6.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 7W

Efficiency: 110lm/W

High efficiency, low flicker driver

3 STEP Mac Adam

Lamp Type: COB

Light source: Citizen / CREE

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Lifetime 50,000hrs at a 25°C(L90/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

Recessed adjustable

Wattage(W)	:	7				
Finish	:	White(W)	Black(B)	Light Blue(LB)		
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	18°	24°	32°	48°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color and Finish on request

Product Code (97705207.50):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out() mm
7	770LM	52x72	45

*Luminous flux value is calculated for 4000K CRI>80, 3 STEP Mac Adam

Photometric:

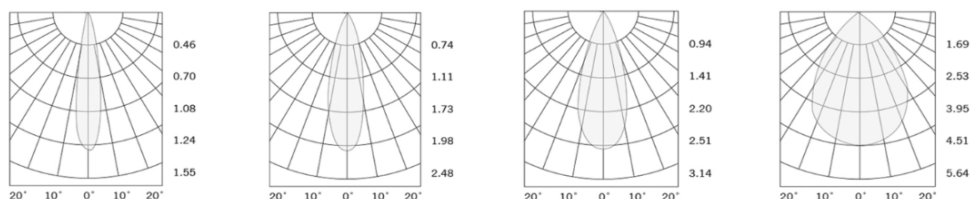

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 9770520750 27K 18D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	18D - 18°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	32D - 32°		3 - DALI	L-Light Blue
50K - 5000K	48D - 48°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C