



MAEN



Features:

- Linear wall washer with die cast aluminum body.
- Good quality aluminum housing and special polarized inner construction design to achieve excellent heat dissipation.
- High efficiency and uniform lighting.
- Efficient wall washing effect, Unique optical and Deep structure design.
- Uniform spot transition without residual light.
- Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 12 W
 High Lumen: 110lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at 25°C
 (L80/B10).

Fields of Application:

Retail
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Recessed

Wattage(W)	:	12					
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	4000K	5000K	5700K	6500K
Beam Angle	:	Polarized					
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color & Finish on request

Product Code (96813512):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
12	1320LM	135x48x59	132x42

*Luminous øux value is calculated for 4000K CRI>80

Photometric:

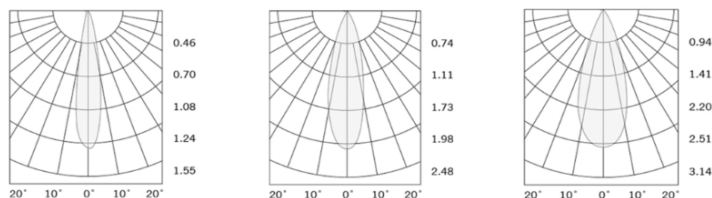

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: <u>96813512</u> <u>27K</u> <u>Polarized</u> <u>8</u> <u>1</u> <u>W</u>				
CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	Polarized	8->80	1 - ON/OFF	W-White
30K - 3000K		9->90	2 - 0/1-10V	B-Black
40K - 4000K			3 - DALI	
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C