


MAEN

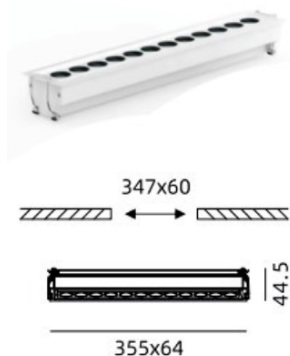

Features:

Linear wall washer with die cast aluminum body.
Good quality aluminum housing and special inner construction design to achieve excellent heat dissipation.
High efficiency and uniform lighting.
Efficient wall washing effect, Unique optical and Deep structure design.
Uniform spot transition without residual light.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 30 W
High Lumen: 110lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed Adjustable.

Wattage(W)	:	30					
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	4000K	5000K	5700K	6500K
Beam Angle	:	15°	24°	36°			
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color & Finish on request

Product Code (96835530.80):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
30	3300LM	355x64x44.5	347x60

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

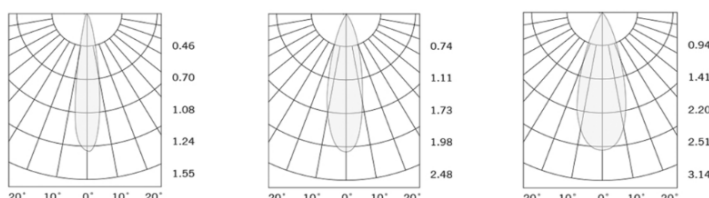

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96835530.80 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C