


MINS

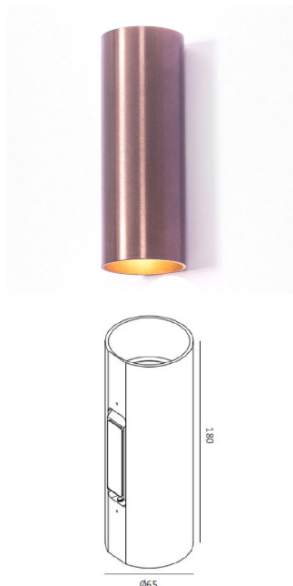

Description:

MINS is an outdoor up and down light wall lamp with special optical design. The design is simple and rich in texture. It is composed of die-casting aluminum, polarized lens and tempered glass. The high-quality outdoor special powder coating process is adopted to make the lamp have strong weather resistance and anti-aging function.

There are three light distribution modes of direct light, direct light + indirect light, and indirect light to choose from, which can meet the needs of various scenes.

The lamp is suitable for indoor and outdoor facade lighting architectural decorative lighting, etc.

Product Specifications:

Housing : Die cast Aluminium grey
Glass : Tempered Glass
Diffuser : Clear Glass
Gasket: Moulding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable: 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type: Surface mounted

Technical Specifications:

Wattage: 8W
Voltage: 24VDC
Frequency: 50-60Hz
Light Source: OSRAM/EPISTAR/CREE
Lumen: 40lm/W
Mac Adam: 3 Step
Safety Class: II
Working Temperature: -20°C to 55°C
Life Time: 50,000hrs (L80/B10) at 35°C
Warranty: 5 Years

Parameter:

Wattage(W)	:	8W
Finish	:	Black (B) / White (W)
Kelvin*	:	2700K / 3000K / 4000K / 6000K
Beam Angle	:	120°
CRI	:	90+
Control Mode	:	ON/OFF / DALI / 0 / 1-10V

Order Code:

Product Code	Wattage	CCT	Voltage	Beam Angle	Finish	Control Mode
540068	8-8W (2x4W)	27-2700K	D - 24VDC	120-120°	B-Black	1-ON/OFF
		30-3000K			W-White	2-DALI
		40-4000K				3-0/1-10V
		60-6000K				

Standards :

EN 60598-1

EN 60598-2-2

EN 60598-3-2

EN 60598-3-3

Ex: Order Code: 540068827D'120B1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C