


OBA



Accessories :



Spike

Description:

OBA is a outdoor spot / spike light for accent and general illumination with low as well as high power LED light sources, excellent heat dissipation.

Adapts high durability, weather-resistant housings suitable for outdoor use. Excellent heat dissipation. It include features such as corrosion resistance, dustproof, anodized and polished, sandblasted, not easy to rust and fade.

It can be installed on a wall, under the ceiling or on the base.

Customized Brackets are available.

Toughened glass surface, with high hardness, not easy to break.

It has very wide application like trees, sign terraced landscape, urban lighting, internal and external walls of buildings, etc.

Product Specifications:

Housing : Die cast aluminum

Coating: Powder Coating

Glass : Tempered Glass

Gasket: Molding shaped silicone seal

Lens/Reflector : Optical lens (efficiency>90%)

Power Cable: 0.5 mt. power cable included

Driver : High efficiency, low flicker driver

Installation Type: Surface / Spike Mounted

Adjustable: Yes

Technical Specifications:

Wattage: 20W

Voltage: DC24V / 220-240VAC

Frequency: 50-60Hz

Light Source: CREE

Lumen: 52lm/W

Mac Adam: 3 Step

Safety Class: III

Working Temperature:-20°C to 55°C

Life Time: 50,000hrs (L80/B10) at 35°C

Warranty: 5 Years

Parameter:

Wattage(W)	:	20W
Finish	:	Black (B) / Grey (G) / White (W) / Silver (S)
Kelvin*	:	2700K / 3000K / 4000K / 6000K
Beam Angle	:	5° / 12° / 24° / 36° / 45° / 60°
CRI	:	80+ 90+
Control Mode	:	ON/OFF / DALI

*Lumen values are calculated at 36° beam angle, 3000K color temperature and CRI 90.


Order Code:

Product Code	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
541103	20 - 20W	27-2700K	D-24VDC	5 - 5°	B - Black	1-ON/OFF
		30-3000K		12 - 12°	G - Grey	2-DALI
		40-4000K		24 - 24°	W - White	
		60-6000K		36 - 36°	S - Silver	
				45 - 45°		
				60 - 60°		

Ex: Order Code: 5411032027D'5B1

Photometric:

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

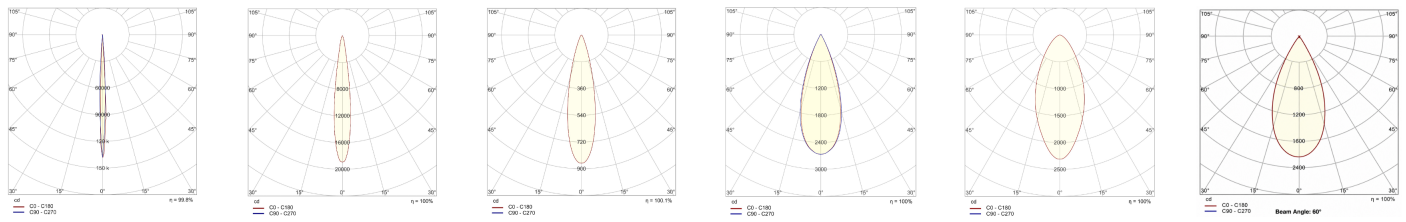

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C